




**İPRAGAZ A.Ş.
DÖRTYOL STORAGE TERMINAL
DANGEROUS CARGOES HANDLING MANUAL**



DATE OF ISSUE: 01.10.2022
(See revision page for revisions)

MERVE TURAN BAGATUR
(Terminal Manager)

Signature




 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	2
	DANGEROUS CARGO HANDLING MANUAL				

Signature

Stamp

REVISION PAGE

(Tablo.1.1.Revision Table)

Serial No	Rev No	Revision Content	Revision Date	Revised By	
				Name Surname	Signature
1	01	Publishing of Directive	01.04.2016	FATİH VARDAR	
2	02	Making changes within the scope of Dangerous Loads Handling Guide Implementation Instruction dated 20.04.2022, published by the General Directorate of Maritime Affairs	01.06.2022	ERKAN AKSU	
3	03	Terminal Manager, Emergency Team and DGSA changed	27.03.2023	GÖKHAN YURTSEVEN	
4	04	DGSA changed	04.09.2023	AYFER KARAASLAN	
5	05	<ul style="list-style-type: none"> Facility information form article 34- Name, title and contact details of the pilotage and towage services provider have been revised ANNEX-9 EMERGENCY MANAGEMENT SCHEME- Marine Pollution Response Officer has been added ANNEX-10 EMERGENCY MANAGEMENT SCHEME- Emergency Incident Commander have been revised 	20.09.2023	AYFER KARAASLAN	
6	06	<ul style="list-style-type: none"> Ipragaz Company Logo change Expiration date of the Coastal Facilities Operation Permit ANNEX-3 Emergency contact points and contact details ANNEX-9 Emergency management chart 	08.01.2024	GÖKHAN YURTSEVEN	
7	07	<ul style="list-style-type: none"> In ANNEX-3 EMERGENCY CONTACT POINTS AND CONTACT INFORMATION, ANNEX-9 EMERGENCY MANAGEMENT SCHEDULE and ANNEX-10 DANGEROUS LOADS MANUAL sections, Yunus Ediz is defined instead of Emin Yahşi in emergency team members. 	13.03.2024	GÖKHAN YURTSEVEN	
008	08	Facility Information Form Article 14	24.06.2024	Seren KARAASLAN	
9	09	Change of Terminal Manager	01.09.2024	Merve TURAN BAĞATUR	
10	10	Dangerous Goods Safety Advisor Change	07.02.2025	NESLİHAN KAYAASLAN	


NESLİHAN KAYAASLAN

Certificate Number

TMKTDGM/TMGD/2015/3569
(Dangerous Goods Safety Advisor)


Signature



 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	3
	DANGEROUS CARGO HANDLING MANUAL				

CONTENTS

CONTENTS.....	3
ABBREVIATIONS:	6
INTRODUCTION	8
1. INTRODUCTION	8
1.1 Facility General Information	8
1.2 Loading/Discharging, Handling and Storage Procedures for Dangerous Goods Handled and Temporarily Stored at the Coastal Facility	11
2. RESPONSIBILITIES	17
2.3 Carrier's Responsibilities	18
2.4 Responsibilities of İPRAGAZ A.Ş. Dörtüyl Storage Terminal	18
2.5 Responsibilities of the person responsible for the Vessel.....	21
2.6 Responsibilities of Cargo/Vessel Agency 3rd Persons etc. Operating in the Coastal Facility ..	22
3. RULES AND MEASURES TO BE IMPLEMENTED BY THE COASTAL FACILITY	23
3.1 General Rules	23
3.3 Rules for Cargoes within the Scope of IGC Code	24
3.7 Other Provisions Specific to Vessels	25
3.8 Measures Taken by İPRAGAZ A.Ş. Dörtüyl Storing Terminal	25
4. CLASSES, TRANSPORTATION, LOADING/ DISCHARGE, HANDLING, SEPARATION, STACKING and STORAGE OF HAZARDOUS LOADS	27
4.1 Classes of Dangerous Goods:	27
4.2 Packages of Dangerous Goods:	31
4.3 Placards, Plates, Brands and Labels for Dangerous Goods:.....	31
4.4 Signs of Dangerous Goods and Packing Groups:	32
4.5 Separation Tables in Vessel and Shore Facility According to Classes of Dangerous Goods ...	32
4.6 Separation Distances and Separation Terms of Dangerous Goods in Warehouse Storages: ..	32
5. MANUAL ON DANGEROUS LOADS HANDLED ON THE COASTAL FACILITY	33
6. OPERATIONAL ISSUES	34
6.1 Procedures for Safely Docking, Mooring, Loading/Discharging, Shelter or Anchoring of Vessels Carrying Dangerous Cargo, Day and Night	34
6.2 Procedures for additional measures to be taken according to seasonal conditions for the loading and unloading of dangerous goods.	34
6.3 Procedures for Keeping Combustible, Flammable and Explosive Cargoes Away from Spark-Creating/May Generate Operations and Not Operating Vehicles, Equipment or Tools that Generate/Create Sparks in Dangerous Goods Handling, Stacking and Storage Areas.	35
7. DOCUMENTATION, CONTROL AND RECORD.....	36
7.1 Procedures Regarding All Mandatory Documents, Information and Documents Related to Dangerous Goods, Procurement and Control of These by Relevant Persons:	36
7.2 Procedures for Keeping the Up-to-Date List of All Dangerous Goods in the Coastal Facility Site and Other Related Information Regularly and Completely:	38
7.3 Procedures for whether Controlling that Dangerous Goods Arriving at the Facility is Properly Defined, Correct Shipping Names of Dangerous Goods are Used, Certified, Packed/Packed, Labeled	

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	4
	DANGEROUS CARGO HANDLING MANUAL				

and declared and Loaded and Transported Safely to the Package, Container or Cargo Transport Unit in Compliance with the Rules and Reporting the Control Results: 39

7.4 Procedures for Obtaining and Keeping a Safety Data Sheet (SDS):..... 39

7.5 Procedures for Keeping Records and Statistics of Dangerous Goods:..... 40

7.6 Procedures on Quality Management System: 40

8. EMERGENCY ISSUES, BEING PREPARED FOR EMERGENCY SITUATIONS AND TO RESPOND TO THEM:..... 41

8.1 Intervention Procedures for Dangerous Cargoes and Dangerous Situations Composed by Dangerous Cargoes that Create/Can Create Risk to Life, Property and/or Environment:..... 41

8.1.2. Intervention Procedures for Dangerous Cargoes in Our Facility that Create/Can Create Risk to Life, Property and/or the Environment and Dangerous Situations that are related with Dangerous Cargoes:..... 41

8.2 Information on the Opportunity, Capability and Capacity of the Coastal Facility to Respond to Emergency Situations: 42

8.3 Arrangements Regarding First Responding to Accidents Involving Dangerous Goods 43

8.5 Accident Reporting Procedures..... 45

8.6 Coordination, Support and Cooperation Method with Official Authorities 45

8.7 Emergency Evacuation Plan for Removal of Vessels and Marine Vessels from the Coastal Facility in Emergency Situations..... 46

8.8 Procedures for Handling and Disposal of Damaged Dangerous Goods and Wastes Contaminated by Dangerous Goods..... 48

8.9.2 The trainings required by the persons engaged in activities related to dangerous goods are implemented as stated below: 49

8.10. Information on Fire Protection Systems 51

8.11 Procedures regarding Approval, Inspection, Testing, Maintenance and Availability of Fire Protection Systems..... 52

8.11.1 Fire Water Tanks and Fire Water..... 52

8.11.2 Fire Water Pumps 52

8.12 Precautions to be Taken in the Cases when the Fire Protection Systems are not Working .. 54

8.13 Other Risk Control Equipment 55

9.2 Information on Personal Protective Clothing and Procedures for Their Use 56

10 OTHER ISSUES..... 59

10.1 Validity of Dangerous Goods Conformity Certificate 59

10.4 Issues Regarding Carriers of Dangerous Goods Coming to/Leaving the Coastal Facility by Seaway (Matters such as Day/Night Signs to be Displayed by Vessels and Marine Vehicles Carrying Dangerous Goods at the Port or Coastal Facility, Cold and Hot Working Procedures on Vessels)..... 61

10.5 Additional Considerations to be Added by the Shore Facility 61

11 ANNEXES..... 62

ANNEX-1 GENERAL LAYOUT PLAN OF THE COASTAL FACILITY..... 63

ANNEX-2 GENERAL VIEW PHOTOS OF THE COASTAL FACILITY..... 65

ANNEX-3 EMERGENCY CONTACT POINTS AND CONTACT INFORMATION 66

ANNEX-4- GENERAL LAYOUT OF AREAS WHERE DANGEROUS LOADS ARE HANDLED 67


ANNEX -8 EMERGENCY ASSEMBLY AREA 71

ANNEX-9 EMERGENCY MANAGEMENT CHART..... 72

ANNEX-13 İSKENDERUN REGIONAL PORT MANAGEMENT ADMINISTRATIVE BOUNDARIES, ANCHORING PLACES AND MARINE COORDINATES OF MANAGEMENT CAPTAIN LANDING/EMBARKING POINTS..... 77


ANNEX-18 OTHER ANNEXES REQUIRED..... 82

MULTIMODAL DANGEROUS LOADS FORM 82

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	5
	DANGEROUS CARGO HANDLING MANUAL				

FIGURES AND TABLES

- Table 1.1 Revision Table.....2
- Table 1.2 Facility Information Table9
- Table 1.3 Dangerous Loads Table.....12
- Table 1.4 Storage Tanks Table.....29
- Table 1.5 Danger Classes Table.....32
- Figure 1.1 Emergency Notification Flow Chart50

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	6
	DANGEROUS CARGO HANDLING MANUAL				

ABBREVIATIONS:

IMO: International Maritime Organization,

IMDG Code: International Code for Dangerous Goods Transported by Sea

BLU Code: Code of Practice for Safe Loading and Unloading of Bulk Carriers,

ISPS Code: International Vessel and Port Facility Security Code,

IMSBC Code: International Maritime Solid Bulk Cargo Code,

IBC Code: International Code on the Construction and Equipment of Vessels Carrying Dangerous Chemicals in Bulk

IGC Code: International Code for the Construction and Equipment of Vessels Carrying Liquefied Gases in Bulk

MARPOL: International Convention for the Prevention of Pollution of the Seas by Vessels,

SOLAS: International Convention for the Safety of Life at Sea,

DEFINITIONS:

Bulk Cargo means substances in solid, liquid and gaseous state intended to be transported without direct containment, which are the structural part of the vessel or in a tank or hold permanently fixed on or on the vessel,

Vessel means Vessels covered by legislation or international agreements to which we are a party


Vessel responsible means the owner, operator, tenant, captain or agents and natural or legal persons authorized to represent the owner

Administration means General Directorate of Maritime Affairs of the Ministry of Transport and Infrastructure of the Republic of Turkey

Carrier means actual carrier, broker, vessel owner, freight forwarder, freight forwarder, shipping agency that receives, submits and accepts offers for the transportation of all kinds of dangerous goods on their own behalf or on behalf of third parties, together with the combined transportation of dangerous goods by sea as well as by road or natural and legal persons carrying out the transport by rail

Dangerous cargoes means

- Petroleum and petroleum products included in the International Convention for the Prevention of Pollution of the Seas by Vessels (MARPOL) 73/78 Annex I, Attachment 1,
- Packaged goods and objects given in IMDG Code Chapter 3,
- Among the cargoes given in IMSBC Code Attachment 1, the bulk cargoes with "B" and "A and B" inscriptions in the group box in the characteristic Table,
- Liquid substances with the phrase "S" or "S/P" in the "d" column of the Table given in Chapter 17 of the IBC Code, titled "hazards",
- Gaseous substances given in IGC Code Chapter 19,

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	7
	DANGEROUS CARGO HANDLING MANUAL				


TMGD means Dangerous goods safety consultants authorized by the administration.

TYUB means Coastal Facility Dangerous Cargo Conformity Certificate, which is issued by the Administration and must be obtained by the coastal facilities that handle packaged or bulk dangerous goods.

Shipper means the real or legal person specified as the "shipper" in the bill of lading, maritime transport document or multi-modal transport document, and the real or legal person on whose behalf or on behalf of the carriage contract has been concluded with a maritime transport company,

Load responsible means Sender, receiver, representative or organizer of transportation works of dangerous goods,

Freight Transport Unit (CTU) means road trailer, semi-trailer and tanker, portable tank and multi-element gas container, railway wagon and tank wagon, container and tank container designed and manufactured for the transport of packaged or bulk dangerous goods

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	8
	DANGEROUS CARGO HANDLING MANUAL				


INTRODUCTION

1. INTRODUCTION

In our Coastal Facility, when dangerous goods are handled or stored at the entrance to the port and in the port areas, whether general safety and security is ensured, the load is surrounded, safety measures are taken for all persons in or near the port area, and the protection of the environment is controlled.


1.1 Facility General Information FACILITY INFORMATION FORM (Table.1.2. FACILITY INFORMATION TABLE)

1	Facility operator name/title	İPRAGAZ A.Ş.
2	Facility contact information (address, phone, fax, e-mail and web page)	Address: Atatürk Mah. Ertuğrul Gazi Sok. Metropol İstanbul Sitesi C2 Blok No:2A/25 (Kat21-24) Ataşehir-İSTANBUL Tel:(216)5135150 Fax:(216)5939200 e-mail: ipranet@ipragaz.com.tr web: www.ipragaz.com.tr
3	Facility Title	İPRAGAZ A.Ş. DÖRTYOL STOKLAMA TERMİNALİ
4	Province	HATAY
5	Contact Details of the Facility (address, telephone, fax, e-mail and web page)	Address: Yeşilköy Mah. Şehit Muhsin Ataç Cad. No:215 Dört Yol-HATAY Tel:(326)7341112-7342186-7342557 Fax:(326)7341588 e-mail: dortyolteknik@ipragaz.com.tr
6	Facility geographical area	Mediterranean Region
7	The Port Authority to which the facility is connected and contact information	İskenderun Regional Port Authority Address: Çay Mahallesi, Beş Temmuz Cd. No:43, 31300 İskenderun/Hatay Tel: (326)614 11 92 Fax: (326) 614 02 26 e-mail: iskenderun.liman@uab.gov.tr
8	Mayorality and Governorship, which the Facility is attached	Dört Yol Mayorality Address: İstasyon Cad. No: 50 Dört Yol-Hatay Tel:0(326) 712 92 01 - 712 92 02 - 712 92 04 Fax:0 (326) 712 34 77 e-mail: basinyayin@dortyol.bel.tr
9	The name of the free zone or organized industrial zone where the facility is located	-
10	Expiration date of the Coastal Facilities Operation Permit / Temporary Operation Permit Certificate	30.09.2026

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	9
	DANGEROUS CARGO HANDLING MANUAL				


11	Facility Activities Status(X)	Own cargo and additional 3rd party (...)	Own cargo (...X)	3rd party (...)
----	-------------------------------	--	------------------	-----------------

12	Name and surname of the facility manager, contact details (phone, fax, e-mail)	MERVE TURAN BAĞATUR Tel: 0 551 388 2308 ; 0 326 734 11 12 ; Faks: 0 326 734 15 88 E-mail: merve.bagatur@ipragaz.com.tr
13	Name and surname of the responsible person for dangerous goods operations, Contact details. (telephone, fax, e-mail)	MERVE TURAN BAĞATUR Tel: 0 551 388 2308 ; 0 326 734 11 12 ; Faks: 0 326 734 15 88 E-mail: merve.bagatur@ipragaz.com.tr
14	Name of Facility Security Hazardous Materials Safety Consultant and last name, contact details (phone, fax, e-mail)	NESLİHAN KAYAASLAN Tel: 0531 956 39 65 E-mail: neslihan.kayaaslan@tehlikeler.com
15	The sea coordinates of the facility	Latitude: 36°49'51" Longitude: 36°08'41"
16	Types of dangerous goods handled at the facility (Loads within the scope of MARPOL Annex-I, IMDG Code, IBC Code, IGC Code, IMSBC Code, Grain Code, TDC Code, asphalt/bitumen and scrap loads)	IGC CODE
17	Dangerous goods handled at the facility (loads other than the IMDG Code, among the cargo types in Article 16, will be written separately. Additional cargo request will be sent to the port authority of the connected region with Annex-1 form. It will be added to TYER when appropriate)	UN 1965 (LPG MIXTURE and PROPANE)
18	Classes for cargo handled, subject to IMDG Code	-
19	Groups in the characteristic Table for the cargo handled, subject to the IMSBC Code	-
20	Types of vessels that can enter the facility	Liquefied Gas Vessel (LPG Vessel)
21	The distance of the facility's main road (kilometer)	2 km.
22	Railway distance of the facility or Railway connection. (yes / no)	N/A
23	Name of the nearest airport and its distance from the facility (kilometers)	Hatay Airport - 90 km.
24	Load handling capacity of the facility (Ton/Year; TEU/Year; Vehicle/Year)	461.496 Ton LPG / year
25	Whether scrap handling is done at the facility	NO
26	Is there a border gate? (Yes No)	NO
27	Is there a bonded area? (Yes No)	NO

	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	10
	DANGEROUS CARGO HANDLING MANUAL				

28	Cargo handling equipment and capacities	14-inch and 10-inch diameter, polyethylene-lined, subsea-laid steel pipeline				
29	Storage tank capacity (m3)	23.100 m ³				
30	Open storage area (m2)	NONE				
31	Half covered storage (m2)	NONE				
32	Indoor storage (m2)	NONE				
33	Determined fumigation and/or de-fumigation area (m2)	NONE				
34	Name, title, contact details of pilotage and tugboat services provider	<div>Ankaş Anadolu Klavuzluk A.Ş. İskenderun Şubesi</div> <div>Adres: Denizciler Mah E5 Karayolu Üzeri</div> <div>106. Sok. Dış Kapı No: 18</div> <div>İskenderun/HATAY</div> <div>Tel: (0326) 645 70 71</div> <div>Faks: : (0326) 645 44 32</div> <div>E-posta: iskenderunpilot@ankaspilot.com</div> <div>Uzmar Gemi İnşa Sanayi ve Tic. A.Ş.</div> <div>Address: Kocaeli Serbest Bölgesi Sepetlipınar Mah 102. Cad</div> <div>No: 14-16 41090 Başiskele / Kocaeli</div> <div>Phone: 0 (262) 341 45 10</div> <div>E-mail: sales@uzmar.net</div>				
35	Has a security plan been created? (Yes/NO)	YES				
36	Waste acceptance facility capacity (This section will be arranged separately according to the wastes accepted by the facility.)	Waste Type		Capacity (m ³)		
		There is no Waste Acceptance Facility.		-		
37	Features of areas such as quays/piers					
Dock / Pier No		Length (meter)	Width (meter)	Maximum depth (Meter)	Minimum Water Depth (Meter)	The Largest Vessel Tonnage and Length to Dock (DWT-GT / Meter)
The buoy system of the Port Facility consists of the pipelines coming from the buoy system and the LPG storage facility.				18	13	70.000 DWT/235 METER
Pipeline Name (If Available)				Number	Pipeline Name (If Available)	Number
Seabed pipeline no.1				1	2.026	14''
Seabed pipeline no.2				1	2.026	10''

Float Name	Marine Coordinates	Number	Float Depth (meter)	Marine Coordinates
AYGAZ LARGE CBM	36° 49' 473" N 36° 08' 681" E	4	18	70.000 DWT

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	11
	DANGEROUS CARGO HANDLING MANUAL				

1.2 Loading/Discharging, Handling and Storage Procedures for Dangerous Goods Handled and Temporarily Stored at the Coastal Facility

1.2.1 General Information

1.2.1.1 Dangerous goods handled and temporarily stored in our Coastal Facility are listed in the Table below:

1.2.1.2 The following issues will be fulfilled in terms of the safety of the coastal facility, employees and ships in the coastal facility in matters such as handling of dangerous goods coming to the coastal facility, keeping them temporarily at the coastal facility, stacking and sorting, and storage.


1.2.1.2.1 In case of need, a coordination meeting will be held at least 1 day before the dangerous goods are accepted to the coastal facility and the participation of Operation, Site planning, HSE, TMGD and other relevant persons will be ensured to be present at this meeting.

1.2.1.2.2 In the coordination meeting, acceptance / rejection or administrative decision is taken by considering the issues within the scope of current IMDG CODE documents, regarding the Dangerous Goods to be accepted to the coastal facility:

1. Risk arising from dangerous cargo
2. Interaction with Dangerous cargoes present in the coastal facility,
3. Interaction with the cargoes planned to be accepted to the coastal facility in the near future,
4. Material and equipment needs in terms of Emergency Response
5. Adequacy of Emergency Response teams
6. Interaction with/from neighboring facilities

1.2.1.2.3 If a decision is made to accept the dangerous cargo at the meeting, the management, operation, storage, security, emergency response units are informed and the preparation and acceptance process is started.

1.2.1.2.4. In case of the need to inform the Port Authority during the admission to the coastal facility, the situation is notified to the Port Authority in writing together with the reasons.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	12
	DANGEROUS CARGO HANDLING MANUAL				

1.2.2 Dangerous Liquid Bulk Cargo Safe Handling Operation Procedure

1.2.2.1 Implementation

1.2.2.1.1 Dangerous Liquid Bulk cargoes are handled with a buoy system at our shore facility.

1.2.2.1.2 In the operation meeting held the day before, the equipment to be used, the number of posts and the team are determined. The SDS form of the cargo is given to the HSE unit by the agency at least 3 days in advance of the ship notification.

1.2.2.1.3 After the ship is securely tied to the buoy with the help of the pilot and mooring, a safety inspection is carried out on the ship. If there is an unsafe situation, the situation is communicated to the ship's person and it is ensured that he takes precautions. Discharge Equipment and pipe selection suitable for the load is made by the operation manager. ISGOTT Ship/Shore Safety Checklist is mutually signed. A communication network is established between the ship and the shore facility.

1.2.2.1.4 Employees are present next to the flexible hoses that will be connected to the ship. It acts together with the ship's personnel in connecting the liquid cargoes to the ship's inlet and outlet manifolds.

1.2.2.1.5 Appropriate pressure adjustment is made with the vessel. Tanks are prevented from overflowing and in case of danger, the ship's personnel are informed and the line is cut off.

1.2.2.2 Requirements


1.2.2.2.1 For the purpose of detecting gas leaks that may occur in the coastal facility, gas detectors will be calibrated and ready for use.

1.2.2.2.2 All kinds of vehicles coming to the filling/discharging platform in the facility will be completely free of static electricity, flame arrester apparatuses will be installed on their exhausts and grounded. Flame arresters will be provided by the Land Tanker operator. Land Tankers that are not flame-retardant will not be admitted to the shore facility. This feature will not be sought for tankers in ADR standards.

1.2.2.2.3 Necessary warnings and warning signs will be placed around the handling area. In dangerous places and situations, the relevant personnel will wear personal protective clothing and equipment in accordance with occupational safety and worker health criteria. Personnel who do not have personal protective clothing and equipment suitable for their job descriptions and working areas will not be employed.

1.2.2.2.4 Periodic maintenance, repair and calibration of the devices used will be carried out and the certificate, journal or registry documenting this situation will be kept up to date.

1.2.2.2.5 In case of emergencies and accidents, first aid materials to be used for intervention will be kept in easily accessible places by the personnel.

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	13
	DANGEROUS CARGO HANDLING MANUAL				

1.2.2.2.6 Radios of the type that can be used safely in the flammable or explosive environment will be used in the loading / unloading operations of the communication equipment used in the coastal facility of dangerous liquid bulk cargoes.

1.2.2.2.7 Flexible hoses used in the discharge/loading of dangerous liquid bulk cargoes will be checked for type approval and a certificate showing the pipe type, the maximum working pressure of the pipe, and the month and year of manufacture. The tests, maintenance and repairs of the pipes in question will be carried out in accordance with the criteria specified in ISGOTT, and the relevant test reports and maintenance and repair records will be kept. Hoses that will be used in loading / evacuation operations but not in service will be kept in accordance with the criteria specified in ISGOTT.

1.2.2.2.8 A sufficient number of electrical insulation flanges shall be available for flexible hoses used in loading/discharging dangerous liquid bulk cargoes.

1.2.2.2.9 The operators of the coastal facilities where dangerous liquid bulk cargoes are handled, the liquid cargo foreman, supervisor, chief and the worker are responsible for the additional safety and security measures to be taken at the coastal facilities.

1.2.2.2.10 In our coastal facility, liquid cargo foreman, supervisor, chief are responsible for the handling of dangerous liquid bulk cargoes and their duties are defined in the quality management system and will act within the framework of these responsibilities.

1.2.2.2.11 In cargo operations and emergency situations, the ship's captain and liquid cargo foreman, according to their areas of responsibility, will provide the following information regarding the dangerous liquid bulk cargoes that are loaded/discharged or transported to the port authority and other relevant persons, if necessary.

1.2.2.2.11.1 By the ship master;


1.2.2.2.11.1.1 Proper shipping name, UN number and definition of physical and chemical properties (including reactivity) of dangerous goods.

1.2.2.2.11.1.2 Load transfer, slop transfer, degassing, inerting, ballasting, ballast discharge and tank cleaning procedures.

1.2.2.2.11.2 By Liquid cargo foreman, supervisor, chief;

1.2.2.2.11.2.1 Information on the special equipment required for the safe handling and loading/unloading of loads, and emergency response procedures, including:

1) Things to do in case of spillage or leakage specified in the Emergency Plans,

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	14
	DANGEROUS CARGO HANDLING MANUAL				

- 2) Measures to be taken to prevent accidental contact of persons with dangerous goods in the Emergency Plan and within the scope of Occupational Health and Safety
- 3) Firefighting procedures specified in the Emergency Plan and appropriate communication systems to be used in case of fire.

1.2.2.2.12 Before and during the handling and loading/unloading operations of dangerous liquid bulk cargoes, it will be checked that the necessary warning notices/signs, in written and pictograms, are placed at all entrances where the said operation will be performed.

1.2.2.2.13 During the handling and loading/unloading of dangerous liquid bulk cargoes, continuous communication will be provided from the Sea Band channel 16 and the working channel specified in the protocol, and the effectiveness of the communication will be ensured during the cargo operations.

1.2.2.3 Piping used for dangerous bulk liquid cargoes

1.1.1.3.1 Flexible Hose:

1.2.2.3.1.1 It shall not be used for loads other than those for which it is suitable, taking into account the temperature and suitability of such loads.

1.2.2.3.1.2 If it is prone to damage by impact, it will be appropriately protected.

1.2.2.3.1.3 In load handling, it shall be ensured that it is electrically continuous, except that it contains an insulating flange or a non-conductive reel piece. The pipeline on the sea side of the insulation section will be electrically continuous to the ship and the land side will be electrically continuous to the grounding system. The insulating flange is to be tested in accordance with section 17 of the International Safety Manual for Fuel Tankers and Terminals (ISGOTT).

1.2.2.4. By liquid load foreman

1.2.2.4.1. Take adequate measures to prevent short circuit in the insulation section


1.2.2.4.2. Ensure that insulation and grounding systems are inspected and tested at appropriate intervals to ensure their effectiveness,

1.2.2.4.3. Shall ensure that other metallic connections between the interface and the shore are protected or regulated to ensure that there is no possibility of an initiating sparking where a flammable atmosphere may occur.

1.2.2.4.4. It will act according to the appropriate checklists in the International Safety Manual for Fuel Tankers and Terminals (ISGOTT).

1.2.2.5. Ignition sources

1.2.2.5.1. The liquid cargo foreman shall ensure that the ship's master is informed of conditions that may require measures to be taken regarding sources of ignition, such as ship's furnaces or cooking utensils.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	15
	DANGEROUS CARGO HANDLING MANUAL				

1.2.2.6. Avoiding Spills

1.2.2.6.1. In case of leakage of dangerous liquid bulk cargoes, the Operations Officer will ensure that all waste water pipe mouths, pipes and drains on the interface are closed before the start of transportation and kept closed throughout the transportation of all dangerous liquid bulk cargoes.

1.2.2.7. Handling

1.2.2.7.1. Flexible Hoses

1.2.2.7.1.1. Within their respective areas of responsibility, the Ship's Captain and Operations Officer will ensure the following:

2. that a Flexible hose is not used at any other working pressure for which it is not suitable or at any working pressure for which it is suitable for the temperature and suitability of such loads.
3. Each type of Flexible hose with end fittings will be checked to be tested and have a certificate showing burst pressure.
4. Prior to being placed into service, each Flexible hose shall be checked from documentation that it has been hydrostatically tested in accordance with Administration requirements.
5. Flexible hoses will be visually inspected before they are put into use. Flexible hoses will be inspected at frequent intervals during operation.
6. Documents showing the flexible hose, the hose type, the specified maximum working pressure, and the month and year of manufacture shall be kept at the facility.
7. It has adequate electrical insulation and the length of the Flexible hose shall be sufficient to operate satisfactorily within the defined operating range without overloading the terminal connections.
8. A Flexible hose equipped for the transport of dangerous liquid bulk cargoes shall be adequately supervised.
9. To protect the environment, personal safety and equipment in the event of emergency, procedures for leak-proof separation of the Flexible hose coupling shall be adequately implemented.

1.2.2.8. Initial measures

1.2.2.8.1. Within their respective areas of responsibility, the Ship's Master and Operations Officer will test the cargo transport controls, measuring systems, emergency shutdown and alarm systems before starting the load transfer operation and ensure that they are adequate.

1.2.2.8.2. Before starting the dangerous liquid bulk cargo operation, the Ship's Captain and the Operations Officer will agree in writing the transportation times including the maximum loading or unloading speeds, taking into account the following points.


1.2.2.8.2.1. Capacity and maximum allowable pressure of ship loa

d lines and Flexible hose;


1.2.2.8.2.2. Steam ventilation system layout and maximum loading or unloading speeds

1.2.2.8.2.3. Possible pressure increases due to emergency shutdown procedures;

1.2.2.8.2.4. Possible electrostatic charge build-up; and

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	16
	DANGEROUS CARGO HANDLING MANUAL				

- 1.2.2.8.2.5** Availability of responsible persons on board and during launch operations on shore;
- 1.2.2.8.3** Appropriate security checklist showing the main security measures to be taken before and during such transfer operations will be completed and signed.
- 1.2.2.8.4** In case of an emergency that may occur during handling operations, the steps to be taken and the signs to be used will be accepted in writing.
- 1.2.2.8.5** Ensure that appropriate safety precautions and clothing are used
- 1.2.2.8.6** The operations manager shall ensure that the start controls on the bulk liquid transfer pumps are locked in the "off" position or located in a location accessible only to authorized personnel;
- 1.2.2.8.7** The Operations Manager will check that the flexible hose's loading/unloading connections are safely and sealed blank when not in use or in standby service.
- 1.2.2.8.8** The "Ship/Shore Safety Checklist" in the International Safety Manual for Tankers and Terminals (ISGOTT) will be filled and signed in accordance with the "Guideline for Completion of the Ship/Shore Safety Checklist" in ISGOTT.
- 1.2.2.9 Pumping**
- 1.2.2.9.1** The Ship's Master and Operations Officer will ensure the following, within their respective areas of responsibility:
- 1.2.2.9.1.1** Checks are made at agreed periods to ensure that accepted back pressures and loading or unloading speeds are not exceeded;
- 1.2.2.9.1.2** All due care is taken to prevent leakage of all relevant pipes, flexible hoses and connected equipment on board and on shore, and adequate inspection is carried out during the transfer of dangerous bulk liquid cargoes;
- 1.2.2.9.1.3** Effective communication is maintained between the ship and shore equipment during transfer operations
- 1.2.2.9.1.4** Ensure that a safety checklist is available for inspection during handling operations.
- 1.2.2.9.1.5** During the handling of dangerous liquid bulk cargoes, necessary arrangements are made for measuring tankers to be discharged to ensure that the tanker is not overfilled;
- 1.2.2.9.1.6** That responsible persons are present during operations on board and on shore;

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	17
	DANGEROUS CARGO HANDLING MANUAL				

1.2.2.3.1.7 Ensure that appropriate safety equipment and clothing are used.

1.2.2.10 Completion of the Operation

1.2.2.10.1 Within their respective areas of responsibility, the Ship's Captain and Operations Officer will ensure that there is no residual pressure in the unloading valves and flexible hoses after the transfer of dangerous bulk liquid cargoes is completed.

Besides:

1.2.2.10.1.1 Before the flexible hose leaves the ship, make sure the fluids are drained and the pressure is relieved;

1.2.2.10.1.2 All safety precautions have been taken, including blind flange sealing of ship manifold connections and flexible hoses, and

1.2.2.10.1.3 It will be ensured that appropriate safety equipment and clothing are used.

1.2.2.11 Also in LPG Operations;

1.2.2.11.1 According to their responsibilities, the ship's master and the shore facility operator should carry out the loading/discharge operation of low temperature liquefied gases only if the following conditions are met.

1.2.2.11.1.1 All relevant tanks, pipelines and other pipelines of the ship and on the shore facility are cooled gradually and evenly to avoid thermal stresses,

1.2.2.11.1.2 Keeping all automatic controls, gas detectors and other related equipment in working order,


1.2.2.11.1.3 Availability of adequate number of personal protective clothing and equipment ready for use.

2. RESPONSIBILITIES

We work diligently to ensure that the activities we carry out in our coastal facility are carried out in a safe, secure and environmentally friendly manner, to prevent accidents, and to minimize the damage that potential accidents may cause to people, the environment and equipment.

2.1. General Responsibilities

The general responsibilities of all parties engaged in the transport of dangerous goods in our coastal facility are as follows:

 İPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	18
	DANGEROUS CARGO HANDLING MANUAL				

- ✓ Taking all measures to ensure that the transportation is safe, secure and harmless to the environment, to prevent accidents and to reduce the damage as much as possible when an accident occurs.
- ✓ All responsible parties should benefit from the EmS Guide, which includes Emergency Response Methods and Emergency Schedules for Vessels Carrying Dangerous Goods, in emergencies such as fire, leakage, spillage that occur during the transportation of dangerous goods.
- ✓ To benefit from the Medical First Aid Guide (MFAG) in the IMDG Code annex in order to provide the necessary medical first aid for the people affected by the damages of the dangerous goods and the health problems caused by the accidents involving these loads.

2.2 Responsibilities of the employee responsible for the cargo

Responsibilities of the employee responsible for the cargo are as follows:

- ✓ To prepare and have all mandatory documents, information and documents related to dangerous goods and get them prepared and to ensure that these documents are present with the cargo during the transportation activity.
- ✓ To ensure classification, identification, packaging, marking, labeling and placarding of dangerous goods in accordance with the legislation.
- ✓ To ensure that dangerous goods are safely loaded, stacked and securely fastened to the approved packaging and cargo transport unit.

2.3 Carrier's Responsibilities


Responsibilities of the Carrier are as follows:

- ✓ To requests mandatory documents, information and documents related to dangerous cargoes from the cargo owner and ensures that they are present with the cargo during the transportation activity.
- ✓ To check the compliance with the legislation of dangerous cargoes classified, packaged, marked, labeled and plated by the cargo subject
- ✓ To check that dangerous cargoes are packaged in accordance with the rules using approved packaging and cargo handling units, that they are safely loaded and securely connected to the cargo carrying unit.


2.4 Responsibilities of İPRAGAZ A.Ş. Dört Yol Storage Terminal

The responsibilities of our Coastal Facility are stated below:


- ✓ Vessels carrying dangerous cargoes are not allowed to dock at the facility without the permission of İskenderun Regional Port Authority.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	19
	DANGEROUS CARGO HANDLING MANUAL				

- ✓ Written information is given to the vessel within the scope of facility rules, cargo handling rules and relevant legislation to approach the facility.
- ✓ Dangerous cargoes for which a handling permit is not obtained from the administration are not handled, and the vessels that will dock will not be victimized by planning in this context.
- ✓ Mandatory documents, information and documents related to dangerous goods are requested from the cargo person and they are provided with the cargo. Our Coastal Facility is not obliged to accept or handle the dangerous cargo at the facility if the relevant documents, information and documents cannot be provided by the cargo person.
- ✓ By sharing all the data that may be required according to the characteristics of the cargo with the vessel concerned, it performs the loading or unloading operation according to the agreement to be reached, and does not make any changes in the operation without the knowledge of the vessel concerned.
- ✓ Considering the safe working capacity of our Coastal Facility and weather forecasts, the working limits have been determined and necessary measures are taken to ensure that the vessel is safely moored at the pier and handling.
- ✓ The transport documents containing the information that the dangerous goods arriving at our Coastal Facility are classified, packaged, marked, labeled, plated and loaded safely to the cargo transport unit are checked.
- ✓ It is ensured that the personnel involved in the handling of dangerous goods and the planning of this handling are trained and documented on the risks of handled dangerous goods, safety precautions, safe working, emergency measures, safety and similar issues, and training records of the personnel are kept. Personnel without documents are not assigned to these operations.
- ✓ It is ensured in our Shore Facility that the dangerous goods handling equipment is in working condition and that the relevant personnel are trained and documented on the use of this equipment.
- ✓ Activities related to dangerous cargoes are carried out at docks and fields established in accordance with these works.
- ✓ The pier reserved for vessels that will load or unload dangerous liquid bulk cargoes is equipped with suitable installations and equipment for this work.
- ✓ An up-to-date list of all dangerous cargoes on the vessels berthed at our Coastal Facility and in the indoor and outdoor areas of our facility is kept and this information is given to the relevant persons upon request.

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	20
	DANGEROUS CARGO HANDLING MANUAL				

- ✓ The instantaneous risk of dangerous goods handled or temporarily stored in our Coastal Facility and the measures taken for it are notified to İskenderun Regional Port Authority.
- ✓ Incidents related to dangerous cargoes, including accidents at the entrance to indoor areas, are reported to İskenderun Regional Port Authority.
- ✓ Necessary support and cooperation are provided in the controls and inspections carried out by the administration and the regional port authority.
- ✓ Dangerous goods that are not allowed for temporary storage are transported out of the coastal facility as soon as possible without waiting. In cases where it is necessary to wait, the Administration is applied to obtain permission within the scope of the relevant regulation.
- ✓ The cargo transport units where dangerous goods are transported are temporarily stored in accordance with the separation and stacking rules, and fire, environmental and other safety measures are taken in accordance with the class of the dangerous cargo in the storage area. Fire extinguishing systems and first aid units are kept ready for use at any time in the areas where dangerous goods are handled, and necessary controls are made periodically.
- ✓ Before the hot work and operations to be carried out in the areas where dangerous goods are handled and temporarily stored, permission is obtained from the İskenderun Regional Port Authority.
- ✓ An emergency evacuation plan has been prepared for the evacuation of vessels from the coastal facilities in emergency situations and the relevant institutions/organizations are informed about the plan approved by İskenderun Regional Port Authority.
- ✓ In our facility, loading to the loading units is ensured in accordance with the loading safety rules.
- ✓ To ensure that vessels are berthed and moored in an appropriate, protected, secure manner.
- ✓ To ensure that the entry-exit system between the vessel and the shore is appropriate and safe.
- ✓ To provide training for people involved in loading, unloading and handling of dangerous goods.
- ✓ To ensure that dangerous goods are transported, handled, sorted, stacked, temporarily suspended and inspected safely and in accordance with the rules by


 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	21
	DANGEROUS CARGO HANDLING MANUAL				

appropriately qualified, trained personnel who have taken occupational safety precautions

2.5 Responsibilities of the person responsible for the Vessel

Responsibilities of the person responsible for the Vessel are as follows:

- ✓ To ensure that the cargo to be carried by the vessel is certified as suitable for transportation and that the cargo holds, cargo tanks and cargo handling equipment are suitable for cargo transportation.
- ✓ To request all mandatory documents, information and documents related to dangerous goods from the cargo person and to ensure that they are present with the cargo during the transportation activity.
- ✓ To ensure that the documents, information and documents required to be found on the vessel within the scope of legislation and international agreements are appropriate and up-to-date.
- ✓ Checking the transport documents containing information that the cargo transport units loaded on the vessel are appropriately marked, plated and loaded safely.
- ✓ Informing the relevant vessel personnel about the risks of dangerous cargoes, safety procedures, safety and emergency measures, intervention methods and similar issues.
- ✓ Keeping the up-to-date list of all dangerous cargoes in the vessel and declaring them to the relevant parties upon request.
- ✓ To ensure that the loading program, if any, is approved, documented and operational.
- ✓ To inform the regional port authority and the coastal facility about the instant risk posed by the dangerous cargoes on the vessel approaching the coastal facility and the measures taken for it.
- ✓ Not accepting the dangerous cargo to carry the dangerous cargo in case of leakage or such a possibility.
- ✓ Notifying the regional port authority of the dangerous cargo accidents that occur in the vessels while navigating or at the coastal facility.
- ✓ To provide the necessary support and cooperation in the controls and inspections carried out by the administration and the regional port authority.

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	22
	DANGEROUS CARGO HANDLING MANUAL				


- ✓ Not accepting to carry dangerous goods that are not included in the vessel certificates issued by the relevant institutions and organizations.
- ✓ Ensuring that the persons in charge of dangerous cargo handling use personal protective equipment suitable for the physical and chemical properties of the cargo.
- ✓ To provide the requirements for the loading safety of the loads loaded on their vessels.

2.6 Responsibilities of Cargo/Vessel Agency 3rd Persons etc. Operating in the Coastal Facility

- ✓ Getting the personnel who will do business in our coastal facility to take the trainings specified in the Directive on IMDG Code Training Seminars published with the Minister's approval dated 26.07.2019 and numbered 56617;
- ✓ Acting in accordance with the rules specified in the IMDG Code in our coastal facility;
- ✓ Acting in accordance with the Dangerous Goods Handling Guide and the procedures regarding dangerous goods created by our coastal facility,
- ✓ Reporting the situation to the facility authorities when any nonconformity is detected in the handling, transportation and storage of dangerous goods in our coastal facility,
- ✓ Sending the (MSDS) Form containing the hazards and risks of the relevant dangerous goods and other information to the coastal facility management and the Administration, which is forming an important part of the efforts to eliminate the Occupational Health and Safety risks that may occur during the use and storage of dangerous goods, and prepared in order to inform the user accurately and adequately;

2.7. Training

- ✓ The procedures and principles regarding the training of the personnel working in the cargo handling activities within the scope of the Regulation on the Transport of Dangerous Goods by Sea and Loading Safety are determined by the Administration.
- ✓ Necessary studies are carried out by the Administration for the implementation of IMO trainings which are required by IMO or if deemed appropriate by the Administration.
- ✓ If during the inspections it is determined that the knowledge and skills of the personnel are insufficient, the Administration may request that the trainings be repeated.
- ✓ For the practical applications of the trainings, first of all, the opportunities of the Ministry are used.

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	23
	DANGEROUS CARGO HANDLING MANUAL				

3. RULES AND MEASURES TO BE IMPLEMENTED BY THE COASTAL FACILITY


3.1 General Rules

The following rules are applied in our coastal facility, which has a Dangerous Cargo Conformity Certificate.

- ✓ If it is not possible to store the dangerous goods in the area where they are unloaded, it ensures that these cargoes are transported out of the coastal facility as soon as possible without waiting in the port area.
- ✓ Dangerous goods should be packed in an appropriate way and there should be information on the package identifying the dangerous substance and information on risk and safety measures.
- ✓ Coastal facility personnel, vessel crew and other authorized persons in charge of dangerous cargo handling wear protective clothing suitable for the physical and chemical properties of the cargo during loading, unloading and storage.
- ✓ Persons who will fight fire at the dangerous cargo handling area are equipped with firefighter equipment and fire extinguishers, first aid units and equipment are kept ready for use at any time.
- ✓ Emergency evacuation plans are prepared for the evacuation of vessels and marine vessels from the coastal facilities in case of emergency and they should be submitted to the approval of the regional port authority.
- ✓ Fire, safety and security measures are taken.
- ✓ When any non-compliance is detected during the inspections carried out by the Regional Port Authority, the handling operation is stopped and the nonconformity is eliminated.
- ✓ Personnel who have not received the necessary training in accordance with the Directive on IMDG Code Training Seminars, published with the minister's approval dated 26.07.2019 and numbered 56617, are not allowed to work in dangerous cargo handling operations and enter the areas where these operations are carried out.

3.2 Loading Safety Rules

- ✓ Our Coastal Facility does not start the operation before the risk disappears, by making the necessary notification to the relevant institutions/organizations, especially the İskenderun Regional Port Authority, about the operation processes.
- ✓ The Regional Port Authority stops the handling operation at the coastal facility when it sees any risk and does not start it until the risk is eliminated.
- ✓ In order to ensure that the cargo is loaded onto the vessel safely, the application Code and provisions suitable for the type of load are followed.
- ✓ Stacking of the cargo is carried out in accordance with the relevant legislation and international agreements to which we are a party.
- ✓ Vessel cannot be loaded more than the loading limit considering the load limit brand. If such a situation is detected, the vessel will not be allowed to cruise and administrative action will be taken against the vessel concerned within the scope of the relevant regulation.

 IPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	24
	DANGEROUS CARGO HANDLING MANUAL				

✓ The results of the draft survey or weighbridge survey are submitted to the regional port authority by the ship owner to determine the loading-unloading plan before the handling operation and the amount of loaded cargo before the vessel is lifted. Administration or regional port authority may request that the draft survey or weighbridge survey report be received from an authorized inspection firm.

✓ Precautions are taken to prevent the stability of the vessel from being adversely affected by ensuring that the cargo in the bulk cargo vessels, especially in bulk cargo vessels with a single hatch, is loaded in a way that spreads (by piping) to the floor of the hold.

✓ It is ensured that the load and ballast water patterns are monitored throughout the loading or unloading operation so that the vessel structure is not subjected to excessive stress.

✓ Care is taken to ensure that the vessel is not inclined, but if an inclination is required during loading, it is ensured that this is as short as possible. In order to avoid structural damage to the vessel, balanced loading and unloading is ensured in accordance with the approved stability book.

✓ In adverse meteorological and oceanographic conditions that may affect the cargo handling operation, the handling operation is stopped by the captain until the conditions improve.

✓ If necessary, the vessel is loaded in accordance with the separation rules of the loads.

3.3 Rules for Cargoes within the Scope of IGC Code

✓ All stakeholders involved in the transportation of cargoes within the scope of liquefied gases and some other substances specified in IGC Code Chapter 19 comply with all obligations regarding safe transportation for the vessel, its personnel and the environment during the transportation of the cargo in bulk by sea.

✓ IGC Code is mandatory since 01.07.1986 in accordance with SOLAS 74 Rule VII/11.1. Surveys and certification of vessels in accordance with the Code are carried out according to SOLAS.


✓ Vessels carrying Liquefied Gas need more stringent measures to protect from fire compared to other vessels in terms of occupational safety. Within the scope of IGC Code Chapter 11, all requirements regarding fire sources, smoking, portable electrical devices, communication devices, hot working, hammering and scraping, vessel shore grounding, self-ignition and static electricity are provided for fire safety.

✓ As per IGC Code Chapter 14., adequate number of protective equipment, first aid equipment, safety equipment and personal protective equipment are available for ship personnel for routine operations or emergencies and the effects of short or long-term handling operations. The features of this equipment are selected in accordance with the definitions made in IGC Code Chapter 14.

3.6 Rules for Transporting Dangerous Goods in the Port Area and Between Adjacent Ports

✓ Dangerous goods are transported in the administrative area of the coastal facility and between adjacent ports, in suitable packages, loaded on cargo transport units and provided that the necessary safety measures are taken by the carrier and the shipper.

✓ While determining the number of passengers to be on the vessels, the provisions of IMDG Code Rule 7.1.3.1 and Section 7.5 are taken into consideration. The procedures and principles in this regard are determined by the Administration.

 İPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	25
	DANGEROUS CARGO HANDLING MANUAL				

3.7 Other Provisions Specific to Vessels

- ✓ Vessels shall comply with the provisions of MARPOL73/78 Annex II Chapter 5 Regulation 13, which contains mandatory provisions governing the discharge of cargo wastes or ballast waters, tank washing waters or other mixtures containing Category X, Y or Z substances.
- ✓ Vessels carrying Category X loads within the scope of MARPOL Annex II, or Category Y cargoes with high viscosity or which can solidify, must pre-wash the cargo tanks they discharged from the discharge port in order to purify them from cargo wastes and deliver their wastes to the waste reception facility.
- ✓ In case the vessels carrying Category Y or Z cargoes do not discharge the cargo in accordance with the evacuation guide (Procedures and Arrangement Manual), the model of which is explained in MARPOL Annex II Attachment 4, or if the alternative measures to be taken are not approved by the regional port authority, they have to pre-wash the cargo tanks they have evacuated from cargo wastes and give their wastes to the waste reception facility before departing from the discharge port.
- ✓ Pre-washing is carried out under a procedure approved by the authorized classification societies for classed vessels, prepared in accordance with MARPOL Annex II Attachment 6, and for unclassified vessels under a procedure approved by the competent authority of the flag state. Administration may grant exemption for pre-washing

3.8 Measures Taken by İPRAGAZ A.Ş. Dörtüyl Storing Terminal

The measures taken in our Coastal Facility regarding the rules specified in Article 11 of the "Regulation on the Transport of Dangerous Goods by Sea and Loading Safety" specified by the Administration are as follows.


- **Storages and Warehouses Separated for Dangerous Goods:**

Dangerous cargoes in our coastal facility are stored in the following tank storages

Storage Tanks

(Table.1.4.Storage Tanks Table)

Tank No / Product	Type	Capacity
T-1 (LPG Mix)	Spherical	5000m ³
T-2 (LPG Mix)	Spherical	5000m ³
T-3 (LPG Mix)	Spherical	5000m ³
T-4 (Propane)	Spherical	3100m ³
T-5 (LPG Mix)	Spherical	5000m ³

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	26
	DANGEROUS CARGO HANDLING MANUAL				

3.8.1 Dangerous Goods Handling Equipment and Installations:

✓ 4 LPG Pumps for Dangerous Goods Handling in the Facility
(1 x 200 m³/h, 3 x 100 m³/h LPG pumps) are used.

3.8.2 Risk and Safety Measures:


Packing/packaging is not performed in our coastal facility.

3.8.3 Protective Clothes Used by Coastal Facility Personnel, Vessel Persons and Other Authorized Persons Related to the Cargo in the Handling of Dangerous Goods during Loading, Unloading and Storage:

- Antistatic Nomexs Shirt for Work Wear
- Antistatic Nomexs Trousers for Work Wear
- Antistatic Work Shoes with steel shoe toe (For Summer)
- Antistatic Work Shoes with steel shoe toe (For Winter)
- Antistatic Nomexs Coat
- Cotton Shirt for Work Wear
- Cotton Trousers for Work Wear
- Cap Helmet (Private Security)
- Cotton Coat
- Antistatic Work Shoes (For Summer)
- Antistatic Work Shoes (For Winter)
- Helmet
- Helmet Visor
- Glasses
- Antifog Full Protection Glasses
- Protective Gloves
- Overalls
- Ear Plug
- Earphone
- Valved Dust Mask
- Half Face Gas Mask
- Gas Mask Filter
- Leather Jacket
- Snow Mask/Beret

3.8.4 Teams to Interfere with Fire at Dangerous Goods Handling Area, Equipment of These Teams, Fire Extinguishing Systems and First Aid Units:

✓ The list and duties of the personnel who will fight the fire in our coastal facility, the fire extinguishing systems and the first aid teams and the duties of these teams are also specified in the "Emergency Action Plan" and "Emergency Crisis Management Plan".

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	27
	DANGEROUS CARGO HANDLING MANUAL				

✓ The firefighting team in our coastal facility is equipped with firefighting equipment and fire extinguishers, first aid units and equipment are always ready for use.

✓ Information on the fire protection systems in our coastal facility is specified in the Dangerous Goods Handling Guide Article 8.10, 8.11, 8.12.

3.8.5 Preparation of Emergency Evacuation Plan for the Evacuation of Vessels and Marine Vehicles from Coastal Facilities in Emergency Situations by Coastal Facility Operators:

There is an Emergency Evacuation Plan prepared by Aygaz.

3.8.6 Matters Regarding Fire, Security and Safety Measures to be taken by Coastal Facility Operators:

✓ Measures taken regarding fire in our coastal facility are specified in the "Emergency Action Plan" and "Emergency Crisis Management Plan".

✓ The measures taken regarding security at our facility are specified in the "Port Facility Security Plan" prepared within the scope of ISPS CODE.

✓ Matters regarding the safety measures taken at our facility are specified in Article-9 of the "Dangerous Cargo Handling Guide".

3.8.7 Required Training and Certificates within the scope of the Directive on the IMDG Code Training Seminar Published with the Ministry's Approval dated 26.07.2019 and numbered 56617:


✓ The personnel involved in the dangerous cargo handling operation have received "General Awareness Training, Job-Specific Training, Renewal Training for Safety Trainings" according to the aforementioned regulation and have certificates. The certificates obtained are kept in the training records file.

✓ Persons who have not received training and do not have a certificate are not allowed to take part in dangerous goods handling operations and to enter the areas where these operations are carried out.

4. CLASSES, TRANSPORTATION, LOADING/ DISCHARGE, HANDLING, SEPARATION, STACKING and STORAGE OF HAZARDOUS LOADS

4.1 Classes of Dangerous Goods:

All cargoes (including mixtures and solutions) and articles subject to the provisions of the IMDG Code fall into one/more of the hazard classes, from Class 1 to Class 9, according to

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	28
	DANGEROUS CARGO HANDLING MANUAL				







the danger they present or the most predominant danger. Dangerous goods classes determined according to IMDG Code rules are listed below.


In our coastal facility, only dangerous goods coming by sea Class 2.1 Flammable Gas, UN1965 HYDROCARBON GAS MIXTURE, LIQUEFIED, N.O.S. (LPG Mixture and Propane) are handled.

Danger Classes




(Table.1.5.Danger Classes Table)

Class 1. Explosives.


	Class 1.1: Mass Explosive Substances and Objects Contains explosives that can cause a mass explosion. Affects almost all charges in an explosion..
	Class 1.2: Substances and articles which have a projection hazard but not a mass explosion hazard Contains explosives that have the risk of throwing fragments but will not cause a massive explosion.
	Class 1.3: Substances and Objects with a Fire Hazard or a Slight Explosion/Jump Hazard, but Not a Mass Explosion Hazard It contains explosives with a risk of fire, with light explosion intensity, with a small risk of ejection, but which will not cause a mass explosion.
	Class 1.4: Substances and articles which present no significant hazard Only a small hazard in the event of ignition during transport with any effects largely Restricted to the package.
	Class 1.5: Mass Explosion Hazard, But Very Low Sensitivity Matter and Objects It contains very low sensitivity explosives that can explode in mass but explode very hard.
	Class 1.6: Extremely insensitive articles which do not have a mass explosion hazard It includes explosives that can explode very hard, have very low sensitivity and at the same time do not have the danger of mass explosion.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	29
	DANGEROUS CARGO HANDLING MANUAL				



Class 2. Gases


	<p>Class 2.1: Flammable gases</p> <p>Substances weighing 454 kg (1001 lbs.) that are gaseous below at 20°C (68°F). These substances have a pressure of 101.3 kPa (14.7psi) and a boiling point of 20°C (68°F) or less at this pressure. They are flammable at 101.3 kPa (14.7 psi) and air mixtures below 13%. Or, regardless of the lower limit, they are flammable in at least 12% air mixture and pressure of 101.3 kPa (14.7 psi).</p>
	<p>Class 2.2: Non-flammable, non-toxic gases</p> <p>This Class includes compressed gases, liquefied gases, and pressurized cryogenic gases, compressed gases in a solution and oxidizing gases. Combustible and non-toxic gases are gases not included in Class 2.1 and 2.3 with a pressure content of 280 kPa (40.6 psia) at 20°C (68°F).</p>
	<p>Class 2.3: Toxic gases</p> <p>Toxic gases, which are known to be harmful to human health and pose a health hazard during transportation, at a temperature of 20°C and below, at a pressure of 101.3 kPa (Boiling points of 20°C or less under this pressure) These are substances with an LC50 value over 5000 ml/m3.</p>


Class 3. Flammable Liquids

	<p>Flammable liquids are substances with a flash point of not more than 60.5°C (141°F), or in liquid form and kept heated for transport with a flash point of 37.8°C (100°F) or higher.</p>
---	---



Class 4. Flammable Solids

	<p>Class 4.1: Flammable solids:</p> <p>They are solids that are flammable as they are. These materials can ignite by friction and have a combustion rate of more than 2.2 mm (0.087 inches) per second.</p> <p>Also included in this Class are metal powders which are flammable and all reacting in 10 minutes or less. Substances that are thermally unstable, react strongly exothermically without the participation of air, and are self-igniting are also in this category. Explosives included in Class 1 but deactivated, or substances specifically included in this Class by the manufacturer.</p>
	<p>Class 4.2: Spontaneously combustible Solids</p> <p>Self-igniting substances are pyrophoric substances. These are substances that ignite within the fifth minute of contact with air or heat up without the need for an additional energy source when they come into contact with air.</p>



 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	30
	DANGEROUS CARGO HANDLING MANUAL				

	<p>Class 4.3: Dangerous when wet:</p> <p>These substances are substances that release flammable and toxic substances in contact with water.</p> <p>The danger measure is to release more than 1 Liter of gas per hour for 1 kg of substance.</p>
---	---


Class.5. Oxidizing agents & organic peroxides

	<p>Class 5.1. Oxidizing Agents</p> <p>It includes substances that cause or contribute to the combustion of other materials, usually by giving off oxygen, whether or not they are combustible themselves.</p>
	<p>Class 5.2. Organic peroxides</p> <p>Organic peroxides are thermally unstable models and can undergo exothermic and self-accelerating decomposition.</p>

Class 6. Toxic and Germ-Infecting Substances


	<p>Class 6.1: Toxic substances</p> <p>Substances known to cause harm to humans during transport are classified as toxic substances. In addition, substances that are determined to be toxic in tests on animals are also considered dangerous for humans and are included in this category.</p>
	<p>Class 6.2: Infectious substances</p> <p>Infectious disease-containing substances are substances known or suspected to carry a pathogen. Pathogens are microorganisms (bacteria, viruses, fungi, etc.) or other factors that cause disease in animals or humans.</p>

Class 7: Radioactive material


	<p>Substances bearing the yellow RADIOACTIVE III (LSA-III) label.</p> <p>Although this label is not used for some radioactive materials, they must have a poster showing the radioactivity.</p>
---	---

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	31
	DANGEROUS CARGO HANDLING MANUAL				

Class 8: Corrosives

	<p style="text-align: center;">Corrosives</p> <p>They are substances that have an abrasive, thickness-reducing effect on human skin upon contact for a certain period of time. Substances that have a corrosive effect on steel and aluminum are also included in this Class.</p>
---	--

Class 9: Miscellaneous dangerous goods

	<p style="text-align: center;">Miscellaneous other dangerous goods</p> <p>Substances that pose a hazard during carriage but do not comply with any of the defined Classes are included in this Class. This Class includes the following items:</p> <p>Anesthetics or other harmful substances. These are substances that may cause discomfort to the flight crew or vessel personnel, preventing them from performing their duties. Substances with increased temperature, harmful substances, residues harmful to human health, or substances with a risk of polluting the sea.</p>
---	---


4.2 Packages of Dangerous Goods:

Dangerous goods coming by sea at our coastal facility are in liquid bulk form, and packing and packaging are not performed in our facility

4.3 Placards, Plates, Brands and Labels for Dangerous Goods:

The following placards, markings and labels are made for dangerous goods arriving by sea at our port facility.



 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	32
	DANGEROUS CARGO HANDLING MANUAL				

Class.2.1. Flammable Gases


4.4 Signs of Dangerous Goods and Packing Groups:
UN1965 HYDROCARBON GAS MIXTURE, LIQUEFIED, N.O.S. (LPG Mixture and Propane) is not included in the packaging group.

4.5 Separation Tables in Vessel and Shore Facility According to Classes of Dangerous Goods

Since the dangerous goods coming to our port facility by sea are one type of product on the vessel and at the port, and there is no cargo belonging to other hazard classes, the separation provisions are not applied.

4.6 Separation Distances and Separation Terms of Dangerous Goods in Warehouse Storages:


Dangerous goods coming to our port facility by sea are stored in tank storages and segregation provisions are not applied since there is no storage in the closed area or warehouse.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	33
	DANGEROUS CARGO HANDLING MANUAL				

5. MANUAL ON DANGEROUS LOADS HANDLED ON THE COASTAL FACILITY

In order to contribute to the safe fulfillment of dangerous cargo loading/unloading, handling and temporary storage activities of our Coastal Facility, A Dangerous Goods Handbook, in dimensions that can be carried in a pocket, INCLUDING Dangerous Goods Classes, packages, packages, labels, signs and packaging groups of dangerous goods, Separation Tables of dangerous goods on the vessel and in the coastal facility according to their Class, separation distances of dangerous goods in warehouse storages, separation terms, dangerous cargo documents, dangerous goods emergency response action flow diagram, emergency contact information, emergency equipment locations, operating instructions and shore facility rules prepared and made available to those concerned. This manual is distributed to the facility personnel about the training received on the subject.

Prepared Dangerous Goods Handbook is attached as Annex-10

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	34
	DANGEROUS CARGO HANDLING MANUAL				

6. OPERATIONAL ISSUES

6.1 Procedures for Safely Docking, Mooring, Loading/Discharging, Shelter or Anchoring of Vessels Carrying Dangerous Cargo, Day and Night

6.1.1 It is the port authority's responsibility to direct where and when to anchor, moor, berth and stay in the port area of a ship with any dangerous cargo on board, taking into account the nature and quantity of dangerous cargoes, the environment, population and weather conditions.

6.1.2 In an emergency, directing a ship with any dangerous cargo on board to be transported in the port area or to be removed from the port area for the safety of the ship and crew can be done with the approval of the ship's captain, the port management decision and the port authority.

6.1.3 It is the responsibility of the port authority to determine any additional requirements in accordance with the local conditions and the amount and nature of the dangerous cargoes exposed.

6.1.4 Port facility operators should ensure the following:

- ✓ Adequate and secure lashing facilities and
- ✓ Adequate and safe access between the ship and the shore

6.2 Procedures for additional measures to be taken according to seasonal conditions for the loading and unloading of dangerous goods.

6.2.1 Bulk liquid cargoes should not be loaded in stormy weather.

6.2.2 In heavy rainy weather, filling / discharging activities are suspended, taking into account personnel safety.

6.2.3 Loading and discharging operations are suspended in case of storms, sudden strong winds and lightning strikes.

6.2.4 In case of snow and icing, port machinery and transfer vehicles are not allowed to operate until the slippery environment is eliminated. When the environment is safe, the vehicles operate at the safest speed.

6.2.5 In case the ship under operation leaves the buoy for compelling reasons before the operation is completed, both the Port Authority and the Customs Directorate are informed.

6.2.6 The relevant procedures are specified in the ship/shore safety checklist.

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016		01.01.2025	35
	DANGEROUS CARGO HANDLING MANUAL				

6.3 Procedures for Keeping Combustible, Flammable and Explosive Cargoes Away from Spark-Creating/May Generate Operations and Not Operating Vehicles, Equipment or Tools that Generate/Create Sparks in Dangerous Goods Handling, Stacking and Storage Areas.

6.3.1 Before performing a hot job in our facility, the responsible company officer who will perform the hot job will have a written authorization issued by the port administration to perform this hot job. Such authorization will include details of the hot workplace as well as the safety measures to be followed.

6.3.2 In addition to the security measures required to be taken by the port administration, additional security measures required by the ship and/or interface will be taken, together with the ship and/or interface responsible(s) responsible for the hot work, before starting the hot work.


6.3.3 These additional security measures will include the following:

- ✓ Frequency of inspection and re-inspection of local areas and adjacent areas, including testing by approved testing organizations to ensure that areas will remain free and free of flammable and/or explosive atmospheres and that there is no oxygen deficiency;
- ✓ Removal of dangerous goods and other combustible materials from work areas and adjacent areas. Materials to be removed from these areas include lime, sludge, sediment and other potentially flammable materials.
- ✓ Effective protection of combustible building materials (e.g. beams, wood partitions, floors, doors, wall and ceiling coverings) against accidental ignition
- ✓ Ensuring Sealing and tightness open pipes, pipe passages, valves, joints, cavities and open parts, in order to prevent flames, sparks and hot particles from spreading from work areas to adjacent or other areas

6.3.4 A copy of the hot work authorization and safety precautions will be posted in the area adjacent to the work area, as well as at the entrance to each work area. Authorization and security measures to be taken will be posted in a place where all employees who will take part in the hot work can see and these will be clearly understood by the employees.

6.3.5 Following should be performed when performing hot work,

- ✓ Controls will be carried out to ensure that conditions have not changed; and

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	36
	DANGEROUS CARGO HANDLING MANUAL				

✓ At least one suitable fire extinguisher or other suitable fire extinguishing equipment shall be available for immediate use in the hot workplace.

6.3.6 With reference to the completion of this work during the hot work and for a sufficient period of time after its completion, an effective fire control will be carried out in the hot work area as well as in the adjacent areas where a hazard from heat transfer may occur.

6.3.7 For additional more detailed information and procedures regarding hot works and processes, the document "International Safety Guidelines for Oil Tankers and Terminals (ISGOTT)" shall be consulted. Permission will be granted for the works to be carried out on the facility and the pier in accordance with ISGOTT and the Work Permit Procedure.

6.3.8 The Port Facility Occupational Safety Procedure will also be applied.

7. DOCUMENTATION, CONTROL AND RECORD


7.1 Procedures Regarding All Mandatory Documents, Information and Documents Related to Dangerous Goods, Procurement and Control of These by Relevant Persons:

7.1.1 The following IMO documents regarding dangerous goods are kept up-to-date in our Coastal Facility.

- SOLAS 2020
- IMDG Code, Volume 1,2 and Supplementary Book
- IGC Code
- IBC Code
- MARPOL Annex-1, Annex-2
- ISGOTT

7.1.2 In order for the dangerous goods arriving at our Coastal Facility to safely handle and to take appropriate precautions, the following detailed documents are required:

- Dangerous Cargo Notification Document
- Container/Vehicle Packaging Certificate
- Documents Required in Vessel
- Other Required Documents and Information
- Multi-Mode Dangerous Goods Transport Form

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	37
	DANGEROUS CARGO HANDLING MANUAL				

7.1.2.1 Dangerous Cargo Notification Document

The shipping documents prepared by the shipper must include a "Signed Certificate or Dangerous Goods Notification Document" stating that the shipment to be transported is properly packaged, marked, labeled and in suitable conditions for shipment.

At least twenty-four hours before entering the port administrative area, Vessel and marine vehicle carrying dangerous cargo submits the notification document containing detailed information about the cargoes to the regional port authority in writing, through the relevant persons. Vessels and marine vessels with a cruising time of less than twenty-four hours until entering the port area should do the same, immediately after their departure from the coastal facility.

The cargo person has to notify the coastal facility at least 3 hours before entering the coastal facility regarding the dangerous goods coming by highway and rail.

In the event that the notification obligation is not complied with or the notifications do not contain correct information, administrative action may be taken against the notifier and they may lose the order of approaching, departing or passing, if any.

When the Dangerous Goods Notification Document is provided to the carrier by EDP (Electronic Information Processing) or EDI (Electronic Information Exchange) techniques, the sender information will be produced without delay as a printed document in the required order in this section.

Dangerous Goods Notification Document can be in any form provided that it contains all the information specified in IMDG Code Section 5.4.


7.1.2.2 Documents Required in Vessel

Each vessel carrying dangerous cargo and marine pollutants shall have a special list, manifest or stowage plan regarding the names and locations of dangerous cargoes and marine pollutants. This particular list and manifest will be based on the documents and certificates required in the IMDG Code.

A detailed stowage plan determined as Class and showing the locations of all dangerous cargoes and marine pollutants can be used instead of this special list or manifest.

For dangerous goods shipments, appropriate information will be at hand at any time to be used in the emergency response to all kinds of accidents and incidents related to dangerous goods during transportation. This information will be away from packages containing dangerous goods and can be accessed immediately in case of an event. The information to be used in the emergency response will be found in the following documents:

- Special list in the manifest or dangerous goods declaration,
- In a separate document such as a safety data sheet,
- In separate documents, such as the Medical First Aid Guide (MFAG) for Use in Accidents Involving Hazardous Substances, and the "Emergency Response Methods for Vessels Carrying Dangerous Goods (EMS Guide)" to be used in conjunction with the transport document.
- Other necessary information and documents

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	38
	DANGEROUS CARGO HANDLING MANUAL				

In certain cases, the following special certificates or documents will be required:

- An air abrasion certificate as required for certain entries in the Dangerous Goods List
- A certificate that excludes the substance, material or object from the provisions of IMDG (see separate entries for charcoal, fish food, seed meal, etc.);
- A notification by the competent authority of the country of origin on the approved Classification and transport conditions, for new self-reactive substances and organic peroxides or new formulations of currently assigned self-reactive substances and organic peroxides,

7.1.2.3 Multi-Mode Dangerous Goods Transport Form

Multi-Mode Dangerous Goods Transport Form is a form that can be used as a combined dangerous goods declaration and container packaging certificate regarding the transportation of dangerous goods in more than one mode.

Example of Multi-Mode Dangerous Goods Transport Form is presented in ANNEX-18.

7.2 Procedures for Keeping the Up-to-Date List of All Dangerous Goods in the Coastal Facility Site and Other Related Information Regularly and Completely:


Our Coastal Facility is obliged to present the information indicating the class, quantity, emergency response methods and locations of all dangerous goods present in the facility, when requested.

The records of the dangerous goods handled in our facility are kept regularly and completely by the operations department, including the following information.

- UN Number,
- Proper Shipping Name (PSN-Proper Shipping Name),
- Hazard Class (with secondary hazards),
- Packing Group (For Class 3, 4.1, 4.2, 4.3, 5.1, 6.1, 8, 9),
- Whether it is a Marine Pollutant,
- Buyer,
- Sender
- seal number,
- Additional Information (Glare, Ignition degree, viscosity, etc.),
- Where it is stored in the coastal facility area,
- Length of stay in the port,

The above-mentioned information is kept in a computer environment or in a file order so that only authorized personnel can access it and is displayed when requested.

Our coastal facility keeps up-to-date the Class and quantity information of the dangerous goods it handles throughout the year and reports it to the regional port authority in quarterly periods.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	39
	DANGEROUS CARGO HANDLING MANUAL				

7.3 Procedures for whether Controlling that Dangerous Goods Arriving at the Facility is Properly Defined, Correct Shipping Names of Dangerous Goods are Used, Certified, Packed/Packed, Labeled and declared and Loaded and Transported Safely to the Package, Container or Cargo Transport Unit in Compliance with the Rules and Reporting the Control Results:

They check the accuracy of the following information on the dangerous goods documents issued by the Sender of the dangerous goods to be accepted to the coastal facility in coordination with the planning and operation:

- UN Number,
- Proper Shipping Name (PSN-Proper Shipping Name),
- Hazard Class (with secondary hazards),
- Packing Group (For Class 3, 4.1, 4.2, 4.3, 5.1, 6.1, 8, 9),
- Whether it is a Marine Pollutant,
- Seal number,
- Additional Information (Glare, Ignition degree, viscosity etc. information)
- Where to store in the Coastal Facility area

This information is conveyed to the Tallymen, Field Supervisors, Warehouse Officers, HSE and the personnel who need to know, through the terminals/documents, and the control of the incoming dangerous cargo is ensured.


In case of differences between the information coming from the operation and the information of the cargo, the Operation is immediately informed and the Shipper is instructed to verify the information about the dangerous cargo / vehicle / container and to correct the missing and incorrect label brands.

7.4 Procedures for Obtaining and Keeping a Safety Data Sheet (SDS):

As of January 1, 2014, it is obligatory to have a Safety Data Sheet (SDS) containing the following information, together with the dangerous goods to be transported in all modes of transport (Road, Railroad, Airway and Seaway) by the laws of our country.

- UN Number,
- Proper Shipping Name (PSN-Proper Shipping Name)
(Required for sea freight)
- Hazard Class (with secondary hazards),
- Packing Group (For Class 3, 4.1, 4.2, 4.3, 5.1, 6.1, 8, 9),
- Whether it is a Marine Pollutant,
- Tunnel Restriction Code (Required for road transport.)

It is checked that the Safety Data Sheet (SDS) is included with the dangerous goods for all dangerous goods accepted to our shore facility.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	40
	DANGEROUS CARGO HANDLING MANUAL				

7.5 Procedures for Keeping Records and Statistics of Dangerous Goods:

The Administration requires that the report containing the information about the dangerous goods handled in our coastal facility be reported to the Regional Port Authority in quarterly periods.


Statistical evaluations from the records of the dangerous goods handled annually in our coastal facility are made by the trade and operations departments.

The monthly count and control reports of dangerous goods stored in our field are prepared by the operations department and submitted to the management.

Records and reports are archived by the departments in 5-year periods.

7.6 Procedures on Quality Management System:

We have **Management Systems** (ISO 9001, ISO 45001, ISO 14001) certificates with a proactive approach in our coastal facility to carry out the service processes in a safe, secure and environmentally friendly manner within the scope of the relevant management systems, to prevent accidents and to minimize the damage that possible accidents may cause to people, the environment and equipment and we also have adopted the principle of continuous improvement with the **Accident Prevention Policy** (KOP) and related procedures and instructions.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	41
	DANGEROUS CARGO HANDLING MANUAL				

8. EMERGENCY ISSUES, BEING PREPARED FOR EMERGENCY SITUATIONS AND TO RESPOND TO THEM:

8.1 Intervention Procedures for Dangerous Cargoes and Dangerous Situations Composed by Dangerous Cargoes that Create/Can Create Risk to Life, Property and/or Environment:


Dangerous goods arriving, handled, stored, loaded and discharged to the coastal facility create unique hazards such as explosion, fire and poisoning. For this reason, it is extremely important to develop, publish and implement a Hazardous Material Emergency Plan in cooperation with local emergency teams in order to cope with the emergencies that the facility may encounter.

The following points are taken into account in the formation of the emergency strategy at the coastal facility;

- Prevention of Accidents
- Preparation of Emergency Action Plan
- Implementation and Practice of Emergency Procedures
- Regular Checking of Emergency Equipment
- Implementation of the Plan when an Emergency Occurs
- Incident Analysis and Report to Prevent Recurrence of the Emergency

8.1.2. Intervention Procedures for Dangerous Cargoes in Our Facility that Create/Can Create Risk to Life, Property and/or the Environment and Dangerous Situations that are related with Dangerous Cargoes:

Intervention to dangerous situations is carried out according to the Hazardous Material Emergency Plan, Emergency and Crisis Management Plan, Emergency Action Plan, Emergency Teams Task Instruction prepared by our facility. Considering the dangerous goods handled in our facility, the main principles for responding to emergency situations are as follows.


 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	42
	DANGEROUS CARGO HANDLING MANUAL				

8.1.2.1. UN 1965 (LPG MIXTURE /PROPANE))

Emergency	Response
In Case of Gas Leakage	<ul style="list-style-type: none"> o Take people who are indoors out to the open air. o Ventilate closed areas thoroughly. o Close the valves of the tanks. o Do not play with electrical switches. o Do not make any hard movements.
In Case of Fire	<ul style="list-style-type: none"> • Make an immediate alarm and evacuate all personnel to the assembly area. • Respond to the fire with the emergency response team. • Inform the nearest fire department. • Close the valves of the LPG tanks in the area. • Cool with water to reduce the temperature of LPG tanks. <p>Respond to the fire as follows.</p> <ul style="list-style-type: none"> ✓ Try to extinguish the fire by suffocating it by performing first aid with dry chemical powder portable fire extinguishers. ✓ Extinguish the fire by cooling with water cannons, pulverized lances and sprinkler system available in our facility.

8.2 Information on the Opportunity, Capability and Capacity of the Coastal Facility to Respond to Emergency Situations:

Possibility, Capability and Capacity to respond to the Fire	<ul style="list-style-type: none"> • 2 Storage Tanks (2X1500 m³) • 2 Diesel Pumps (750 m³/h) • 1 Diesel Pump (300 m³/h) • 1 Electric Pump (200 m³/h) • 1 Joker Pump (40 m³/h) • Fire Circuit Pressure 11 Bar • 8 Monitors • 1 Portable Monitor • 15 Hydrants and 30 Reels connected to them • 17 Pieces 50 Kg Dry Chemical Powder • 3 Pieces 12 Kg Dry Chemical Powder • 17 Pieces 6 Kg. Dry Chemical Powder • 1 Pieces 1 Kg Dry Chemical Powder • 3 Pieces 30 Kg. CO₂ Tubes • 7 Pieces 5 Kg. CO₂ Tubes o There are sprinkler cooling systems that are automatically activated at the top, equator and lower curtain concrete in spherical tanks, LPG pump
---	---

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	43
	DANGEROUS CARGO HANDLING MANUAL				


	stations and tanker filling stations at the top of cylindrical tanks.
Leakage and Spill Opportunity, Capability and Capacity	It is specified in Annex-14

8.3 Arrangements Regarding First Responding to Accidents Involving Dangerous Goods

8.3.1 Principles Regarding First Response to Accidents involving Dangerous Goods Handled in Our Facility

Medical First Aid Guide (MFAG) is used in accidents involving dangerous substances.


Dangerous Cargo	Responding Principles
-----------------	-----------------------

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	44
	DANGEROUS CARGO HANDLING MANUAL				

UN 1965 (LPG MIXTURE/PROPANE)	<ul style="list-style-type: none"> ○ Take the person exposed to LPG/PROPANE inhalation to the open air and rest. ○ If breathing difficulties, seek medical help. ○ If there is no breathing, give artificial respiration, give oxygen, and call for medical help. ○ Immediately wash the contacted parts with plenty of clean water. ○ Immediately remove contaminated clothing. ○ Remove items such as watches, rings, bracelets if they are not stuck, if they are, leave them as they are. ○ Do not rapidly rewarm the liquid contacted limb, rather do it slowly. ○ In case of contact with the eyes, immediately flush the eye with clean water for 15 minutes and cover the eye with a sterile compress. ○ In important cases, take the patient to a nearby medical center. ○ Our first aid team personnel will use full-face protection, respiratory system support, head and neck protective clothing, gloves and protective antistatic boots against the risks that may arise, and they will not use cigarettes and mobile phones, etc. will not use tools.
-------------------------------	--

Notifications to be Made Inside and Outside the Facility in Emergency Situations

- ✓ When the accident occurred,
- ✓ If the accident is known, how it occurred and the reason,
- ✓ The place where the accident occurred (coastal facility and/or ship), its position and area of influence,
- ✓ Information, if any, of the ship involved in the accident (name, flag, IMO number, owner, operator, cargo and quantity, name of the captain and similar information),
- ✓ Meteorological conditions,
- ✓ UN number of the dangerous substance, proper transport name (based on the legislation specified in the definition of dangerous substance) and amount,
- ✓ Hazard class of the dangerous substance or sub-hazard division, if any,
- ✓ Packing group of the dangerous substance, if any,
- ✓ Additional risks of the dangerous substance, such as marine pollutants, if any,
- ✓ Sign and label details of the dangerous substance,
- ✓ The characteristics and number of the package, cargo transport unit and container in which the dangerous substance is transported, if any,
- ✓ Manufacturer, sender, carrier and receiver of dangerous goods,
- ✓ The extent of the damage/pollution,
- ✓ Number of injured, dead and missing, if any,
 - ✓ Emergency response applications made by the coastal facility for the accident.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	45
	DANGEROUS CARGO HANDLING MANUAL				

8.5 Accident Reporting Procedures

8.5.1 Communication

8.5.1.1 Communication channels for determining the communication methods inside the port and outside the facility in case of an emergency that may occur at the coastal facility and for the effective management of emergencies have been determined as follows;

- ✓ Fixed/ Mobile Phones
- ✓ Computers
- ✓ Radio
- ✓ Siren
- ✓ messengers

8.5.1.2 In the case of an emergency in the coastal facility, internal communication is primarily provided by radio and internal telephones. The communication between the Port and the Ship is maintained by the radio provided by the Port or by the VHF marine band radio.

8.5.1.3 In the case of an emergency that may occur at the coastal facility, secure communication is ensured as soon as possible with the official authorities, neighboring facilities and relevant persons.

8.5.2 Reports

8.5.2.1 The Emergency Management Center will operate the reporting system that will accurately inform the relevant authorities of the Emergency that will occur in the Port as soon as possible. It will create a healthy record of these reports containing the information that should be reported in an emergency.

8.5.2.2 Dangerous cargo accidents must be reported to the Port Authority. The report format will be a free form and will fully cover the article 8.4 related to the accident.

8.6 Coordination, Support and Cooperation Method with Official Authorities


8.6.1 The method of coordination, support and cooperation with official authorities is as stated in the Emergency Crisis Management Plan, General Communication Plan for Emergencies and Emergency Action Plan prepared by our Coastal Facility

8.6.2 In case of signs of a possible explosion, fire or emergency in the adjacent facility; First of all, measures will be increased at the facility.

It will be ensured that the teams are prepared to assist the neighboring facility.

8.6.3 Considering the urgency of the situation and the extent of the danger, when it is evaluated that there is no opportunity or time to ask for help, aid and support teams will be assigned to intervene in the event.

8.6.4 By evaluating the dangerous cargo area and the class, quantity and danger risk of the cargo in the field, preparations will be made for measures such as discharging and

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	46
	DANGEROUS CARGO HANDLING MANUAL				

dilution of the cargo, and lifting the vessel to the anchorage if there is a vessel at the interface.

8.7 Emergency Evacuation Plan for Removal of Vessels and Marine Vessels from the Coastal Facility in Emergency Situations

8.7.1 Preparation for Emergency Disconnect System

8.7.1.1 All emergencies should be reported to the Port Authority authorities.

8.7.1.2 If it is decided to move the vessel from the buoy urgently, the safe places where the vessel can be transported under controlled conditions should be specified by the Port Authority.

8.7.1.3 The ship master and the port facility will initiate the emergency departure process by mutual agreement in cases where urgent separation is required and will notify the Port Authority as soon as possible. In cases where the severity of the emergency and time permits, a representative from the Port Authority or the Harbor Master, Terminal Manager/Operation Officer, Ship Captain, Guide Captain will agree on the time and manner when and how the vessel will leave the buoy before the emergency leaving is made.


8.7.1.4 The vessel's machinery, steering gear and Marine System breakout equipment should be ready for immediate use.

8.7.1.5 All cargo unloading, ballast operations must be stopped and prepared for separation.

8.7.1.6 The ship fire circuit should be flooded and water mist should be used for strategic sections.

8.7.1.7 If venting to the atmosphere is required, engine room personnel should be available, all non-essential receiving inputs should be closed, all safety precautions related to normal operation should be followed and a warning notice should be issued.

8.7.1.8 In all emergencies, if the required response exceeds the terminal facilities, the local police or fire department should be reported immediately.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	47
	DANGEROUS CARGO HANDLING MANUAL				

8.7.1.9 The decision that the ship will be lifted under control is based on the principle of life safety and should also cover the following conditions.

- ✓ Qualification of tugs
- ✓ The ability of the ship to take off under its own power
- ✓ Availability of safe places to proceed or tow a Ship in an emergency
- ✓ firefighting competence
- ✓ Proximity of other ships
- ✓ Fire Ropes

8.7.1.10 As long as the ship is in the port facility, fire ropes should be kept on the head and shoulder of the ship on the sea side. The eye of the ropes should be lowered to sea level and the part above the side should be tightened by wrapping at least five turns on the bollard. The part of the rope above the side must be tight from the bollard. A rope that can support the rope should be tied just before the eye of the rope and positioned so that the eye of the rope is three meters above sea level. While the ship is in the port facility, the eye of the rope should be kept at this level all the time.

8.7.2 Realization of Emergency Unberthing


8.7.2.1 If all the above preparations are examined and deemed appropriate, the ship will be immediately removed from the ship.

8.7.2.2 Emergency unberthing procedures will be provided by performing the following procedures in order.

8.7.2.2 Close coordination and cooperation between Terminal, Ship and Port Authorities is required at each stage.

8.7.2.4 Emergency unberthing procedure is as follows.

- ✓ Sounding the Alarm
- ✓ Vhf, giving information about the emergency via telephone
- ✓ Making the first situation assessment between the ship master and the port facility officer
- ✓ Stopping the operation
- ✓ Implementation of port facility and ship emergency plan measures
- ✓ Deterioration of the current situation and the aforementioned emergency separation
- ✓ Availability of conditions.
- ✓ Evaluation of the situation between the ship master, the port facility officer, the port authority or the Harbor Master, the pilot
- ✓ Deciding on an emergency unberthing
- ✓ Informing surrounding facilities and other vessels
- ✓ The tugboats are deployed for emergency separation around the ship, complete their preparations and indicate readiness
- ✓ The captain of the ship completes the preparations for the ship and states that it is ready.
- ✓ Approval to open the release hooks by the authorized person

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	48
	DANGEROUS CARGO HANDLING MANUAL				

CAUTION!

THE SHIP EMERGENCY UNBERTING PROCESS MUST BE CONSIDERED TO BE APPLIED AS A LAST REMEDY AND THE SEPARATION HOOKS MUST NOT BE RELEASED UNTIL ALL PRECAUTIONS ARE TAKEN AND THE ABOVE CONDITIONS ARE FOLLOWED.

8.7.3 After Emergency Unberthing

8.7.3.1 Deciding and declaring the vessel to be towed and the location to be taken after the unberthing process.

8.7.3.2 Transfer / mooring of the ship to the allocated area, accompanied by tugboats or with its own machinery

8.7.3.3 Detection of a possible damage or deficiency by examining the Port Facility

8.7.3.4 Evaluation of when the ship and port facility will be ready for cargo handling again

8.7.3.5 Sharing the negativities, if any, that occurred during the Emergency Departure
An agreement has been made between the pilotage and tugboat organization and the coastal facility authorities for fire, explosion and similar emergencies that may occur during loading/evacuation.

In accordance with the protocol signed with the authorized company, tugboats with sufficient towing power and number equipped to fight fires according to the weather and sea conditions reach the scene as soon as possible in case of emergency in order to quickly move the ship away from the facility and tow it to a safe point.

8.8 Procedures for Handling and Disposal of Damaged Dangerous Goods and Wastes Contaminated by Dangerous Goods

There is a Safety Data Sheet (SDS) for each dangerous cargo handled in our facility. In the aforementioned forms, the handling and disposal of damaged dangerous cargoes and wastes contaminated by dangerous goods are taken into account.

8.9 Emergency Drills and Their Records


8.9.1 The trainings required by the persons engaged in activities related to dangerous cargoes are implemented as stated below:

✓ Every person involved in the transportation or handling of dangerous goods should receive training in proportion to their responsibilities regarding the safe transportation or handling of dangerous goods.

✓ Shore personnel should receive general awareness training, task-specific training and safety training.

The duties of those who will receive training may be as follows:

- Classifying the dangerous goods and defining the proper freight names of the dangerous goods;
- Packing dangerous goods into packages;
- Marking or labeling dangerous goods;
- Opening/closing the packages of dangerous goods transport units;
- Preparing shipping documents for dangerous goods
- Offering dangerous goods for transport;
- Accepting or receiving dangerous goods for transport;
- Handling dangerous goods in transit;
- Prepares dangerous goods loading/stacking plans;
- Loading/unloading dangerous goods from/to ships

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	49
	DANGEROUS CARGO HANDLING MANUAL				

- Carrying dangerous goods in transit;
- Deactivating dangerous goods packages/packages;
- Measuring and taking samples from dangerous goods warehouses;
- Washing the dangerous goods warehouses in accordance with the approved procedures and regulations;
- Enforces, monitors or monitors compliance with legal requirements and rules and regulations; or
- otherwise involved in the transport of dangerous goods as determined by the competent authority.

8.9.2 The trainings required by the persons engaged in activities related to dangerous goods are implemented as stated below:

✓ Every person involved in the transportation or handling of dangerous goods should receive training in proportion to their responsibilities regarding the safe transportation or handling of dangerous goods.


✓ Shore personnel should receive general awareness training, task-specific training and safety training.

The duties of those who will receive training may be as follows:

- Classifying the dangerous goods and defining the proper freight names of the dangerous goods;
- Classifying the dangerous goods and defining the proper freight names of the dangerous goods;
- Packing dangerous goods into packages;
- Marking or labeling dangerous goods;
- Opening/closing the packages of dangerous goods transport units;
- Preparing shipping documents for dangerous goods
- Handling dangerous goods in transit;
- Preparing dangerous goods loading/stacking plans;
- Loading/unloading dangerous goods from vessels/vessels;
- Carrying dangerous goods in transit;
- Deactivating dangerous goods packages/packages;
- Measuring and taking samples from dangerous goods warehouses;
- Washing the dangerous goods warehouses in accordance with the approved procedures and regulations;
- Enforcing, monitoring or implementing compliance with legal requirements and rules and regulations; or
- Otherwise involving in the transport of dangerous goods as determined by the competent authority.

8.9.3 Otherwise involving in the transport of dangerous goods as determined by the competent authority.

- **General Awareness Training**

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	50
	DANGEROUS CARGO HANDLING MANUAL				

Everyone receives training in proportion to their duties related to the safe transportation or handling of dangerous goods. The training defines the general hazards of the loads involved and the legal requirements. This training includes the definition of dangerous goods types and classes, labeling, marking, packaging, separation and compliance with requirements, purpose definition and content of shipping documents, and definitions of current emergency responses.

- **Duty Specific Training**

Everyone should receive detailed training on the specific requirements for the safe transport or handling of dangerous cargoes in accordance with the function they perform.

- **Safety Training**

Everyone should receive training on the following regarding the risks and functions performed in the case of dangerous cargo release:


- Packaging – accident prevention methods and procedures for proper stacking and separation of handling equipment and dangerous goods;
- Required emergency response information and how they are used;
- How to avoid exposure to hazards, including the general hazards of the various types and Classes of dangerous goods and, where appropriate, the use of personal protective clothing and equipment;
- Emergency procedures to be followed in the unintentional release of dangerous cargo, including any emergency procedures for which the person is responsible and personal protection procedures to be followed.

8.9.4 Emergency procedures to be followed in the unintentional release of dangerous cargo, including any emergency procedures for which the person is responsible and personal protection procedures to be followed.

8.9.5 Drills and Records Related to Dangerous Goods

✓ **Drills:** In order to be prepared for emergencies within the facility, the personnel in the emergency organization are prepared for their duties with various trainings. Trainings are carried out with the support of specialist organizations when necessary. In this context, the relevant personnel at the port received IMDG CODE training on Dangerous Goods and were certified. It is planned to carry out and implement the drills in order to test the adequacy of the emergency plans and to be prepared for real situations, according to the worst scenarios that may occur at the facility.

✓ **Drill Scenarios:** In the exercise planning, the worst scenario is foreseen as a single event or a combination of events that the facility may encounter. In line with the

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	51
	DANGEROUS CARGO HANDLING MANUAL				


prepared scenarios, exercises are implemented in the fastest and most effective way.

Emergency Drills to be Made within the Shore Facility:

- The port should be specified in the annual training plans.
- They can be planned as a local or general intervention,
- Safety, spill etc. can be combined into the drill scenarios,
- Drills can be made with or without notice.
- The drills are based on various emergency scenarios.
- Either actual drills can be made or they can be performed as a seminar.
- Different time, day, season and event scenarios are prepared for each drill

8.10. Information on Fire Protection Systems

Within the scope of fire protection systems in our facility, there are storage tanks, hydrants, fire monitors, sprinklers, portable fire extinguishers and fire alarm buttons. Information on fire protection systems is as specified in Article 8.2.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	52
	DANGEROUS CARGO HANDLING MANUAL				

8.11 Procedures regarding Approval, Inspection, Testing, Maintenance and Availability of Fire Protection Systems

8.11.1 Fire Water Tanks and Fire Water

8.11.1.1 In order to prevent algae and sludge formed at the bottom or side of the tank from creating a hazard during a fire, it should be emptied and cleaned at least once a year. During the emptying of the pools, the intake valve, check valve and filters are maintained.

8.11.1.2 In case of rapid drops in the water level, the leak location should be investigated and the malfunction should be corrected, if any, due to the possibility of leakage.

8.11.1.3 As a result of the annual checks to be made, internal cleaning and maintenance should be carried out in closed warehouses, if necessary.

8.11.2 Fire Water Pumps

8.11.2.1 In addition to the planned maintenance, the issues to be considered regarding the operation of fire pumps and the elimination of possible malfunctions are listed below.


8.11.2.1.1 It should be checked that the thrust bolts of the packing bearings of the pumps are mutually tight so that the pump can be easily turned by hand. It is normal for water to drip from the packing bearings during the operation of the pump. In order to prevent this water from flowing to the floor, it should be connected to the drainage with a thin pipe from the threaded mouth under the bearing console.

8.11.2.1.2 Fire water pumps are operated and recorded for at least 1 hour a week.

8.11.2.1.3 Make sure that the pump and suction pipe are completely filled with water. If this is suspected, water should be filled by opening the water filling plug and the air intake taps, until the water overflows from the air intake taps, and the plug should be tightened when the water stops at the plug level.

8.11.2.1.4 Pump motors will draw more current than normal due to inrush current at the first moment of operation. When all pumps start working at the same time, due to the high current to be drawn, disjunctions may trip or major malfunctions may occur in the diesel generator. For this reason, the time relays that regulate the transition from star to delta in the protective switches that drive the pump motors should be adjusted according to different and appropriate time intervals according to the number of pumps and the amount of pumps to be activated at the same time, and the pumps should be activated sequentially.

8.11.2.1.5 After the above preparation and controls are made, the pumps are started by pressing the drive switches. During operation, the voltage of the electric motor and the amperage it draws should be checked from time to time. If the amperage draw is high in normal operation, the causes should be investigated and corrected. There may be a fault or mechanical stress in the pump or motor. Voltages below normal can be dangerous to the motor.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	53
	DANGEROUS CARGO HANDLING MANUAL				

8.11.2.1.6 Manometers should be kept under constant control and one or more of the pumps should be stopped in case of excessive pressure rises.

8.11.2.1.7 The discharge pipes of the pumps must be equipped with a valve first and a check valve after the valve.

8.11.2.1.8 If the check valve in the discharge pipe of the inoperative pump prevents the check valve from closing completely by jamming materials such as paper, garbage, stone pieces, moss and slime, some of the water pumped by the other pumps is pressed back into the pool while passing through these inoperative pumps and suction pipes. This fault, which restricts the required water flow in the event of a fire, must be eliminated. If a rotation is observed in the couplings of some of the non-operating pumps during the operation of some pumps, it should be considered as an indication of the existence of the above-described fault in these pumps.

8.11.2.1.9 If a rotation is observed in the couplings of some of the non-operating pumps during the operation of some pumps, it should be considered as an indication of the existence of the above-described fault in these pumps.

8.11.2.1.10 It should be ensured that the pump and motor rotate in the right direction during operation. For this reason, the direction of rotation must be drawn on the couplings and the control must be done accordingly.

8.11.2.1.11 During the operation of the pumps, the temperature of the pump and motor bearings can be hot enough to withstand the hand. If the temperature is high, it may be due to internal mechanical stress or coupling misalignment. In such cases, the pump must be stopped immediately and the fault must be corrected.

8.11.2.1.12 In pumps driven by a diesel engine, the engine must be started in accordance with the special instructions.

8.11.2.1.13 If any deficiencies or malfunctions are detected as a result of the control, they are corrected by the responsible persons.

8.11.3 Sprinkler Installation


8.11.3.1 The most important point to be considered and the maintenance to be done in the sprinkler installation is to prevent the sprinkler heads from clogging. To ensure this, the sprinkler must be operated in accordance with the standards/legislation and it must be ensured that it is in working order. Sufficient sprinkler heads should be kept as spares in each facility, and in case of a failure, they should be replaced with new ones and the defective ones should be repaired and backed up.

8.11.4 Fire Hydrant

8.11.4.1 Rain water should be prevented from entering the fire hydrant hose cabinets; the hoses should be intact, strong and sufficiently tightened. At least one of the hoses should always be kept connected to the fire valve.

8.11.4.2 Fire valves must be fault-free and leak-proof. Defective nozzles, valves, hoses will be promptly replaced with new ones, and faults should be repaired and backed up. For this reason, a sufficient amount of hoses, nozzles, fire valves, clamps, couplings and spare materials should be available in each facility. In the fire installation, it is not allowed to wait for the fault for any reason.

8.11.4.3 Working fire hoses should not be placed in cabinets when they are wet and contain water, while the malfunctions detected following the drills are eliminated. Facilities should provide suitable hose hangers for the complete draining and drying of the water in the hoses and should not put them back in place without making sure that the

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	54
	DANGEROUS CARGO HANDLING MANUAL				

hose is thoroughly dried. If sea water has been pumped with hoses, they must first be washed with fresh water and dried in a cool-windy place.

8.11.4.4 All pipes of the fire hydrant and sprinkler installation should be inspected every three months, rusted parts must be painted, rotten parts must be replaced with new ones, valves and check valves must be checked and faults must be corrected.

8.11.4.5 All fire hydrants, hoses and nozzles are repaired by the responsible persons if any deficiencies or malfunctions are detected as a result of the control.

8.11.5 Portable Fire Extinguishers

8.11.5.1 Sufficient spare devices should always be available in plant warehouses for malfunction, control or maintenance. For the above purposes, spares should be put in place of the extinguishers taken from their places in order.

8.11.5.2 All fire extinguishers are eye-examined and checked on a monthly basis. After the control, the extinguishers are marked. During the control, especially dry powder extinguishers are turned upside down and tapped lightly on the base, thus allowing the powder in the tube to move. Otherwise, the powder inside the extinguishers, which remain in the same position for a long time, may settle to the bottom and solidify. If any deficiencies or malfunctions are detected as a result of the control, they are corrected by the relevant responsible persons.

8.11.5.3 Fire extinguishers are subjected to a general control once a year by the seller company, according to the TS ISO 11602-2 Fire Protection Portable and Wheeled Fire Extinguishers standard. Fire extinguishers are tested by the relevant company at intervals not exceeding 10 years, and chemical powder is checked at the end of the 4th year.

8.11.6 Freeze Protection

8.11.6.1 Protection of Generators

8.11.6.1.1 When the outside temperature drops below +4C in winter, the water may start to freeze. For this reason, the radiators of generators with water-cooled engines should be secured with antifreeze.

8.11.6.2 Protection of Fire Water Pumps

8.11.6.2.1 Fire water pumps and suction pipes are always filled with water. Therefore, the ambient temperature should not fall below +4C.

8.11.6.3 Protection of Fire Water Distribution Pipes

8.11.6.3.1 The exposed main and branch pipes must be protected against freezing up to the hydrant taps. Therefore, the lines are protected against freezing either by means of insulation or by laying underground.


8.12 Precautions to be Taken in the Cases when the Fire Protection Systems are not Working

8.12.1 Facility fire-fighting equipment is systems that back up each other and are installed as alternatives to the other.

8.12.2 In cases where own firefighting equipment of the facility does not work or is insufficient, the support of neighboring facilities, Fire Brigades and AFAD Units will be requested.

8.12.3 It is ensured that other dangerous and flammable materials/vehicles that are likely to be affected by the fire are removed from the area, if possible.


8.12.4 It may be necessary to make a protocol that specifies the conditions and scope of assistance and support.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	55
	DANGEROUS CARGO HANDLING MANUAL				

8.12.5 The capabilities of tugboats and sea vehicles with fire extinguishing features should also be taken into account.

8.13 Other Risk Control Equipment

Other risk control equipment is not available.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	56
	DANGEROUS CARGO HANDLING MANUAL				

9 OCCUPATIONAL HEALTH AND SAFETY

9.1 Occupational Health and Safety Measures

The objectives of the occupational health and safety works in our facility are listed below

To Protect the Employees

It constitutes the main purpose of occupational health and safety works. It is aimed to ensure mental and physical integrity by protecting employees against work accidents and occupational diseases.

To ensure the production safety

Ensuring production safety in a workplace is especially important from an economic point of view, as it will result in increased productivity.

Ensuring Operational Security

With the measures to be taken in the workplace, operational safety will be ensured as situations that may endanger the business such as machine malfunctions and shutdowns, explosion events, fire, which may arise due to work accidents or an unsafe and unhealthy working environment.

The measures specified in the "Occupational Health and Safety and Work Permit Procedure" and the "Contractor Safety and Security Instruction" prepared within the scope of Occupational Health and Safety in our facility are taken into consideration.

9.2 Information on Personal Protective Clothing and Procedures for Their Use

The personal protective clothing used in our coastal facility is in the standards specified in the following figure, and it is specified in Table attached as Annex-15, which shows which of these clothes will be worn by whom.

Document No	Issue Date	Rev. No	Revision Date	Page No
	01.01.2016	9	02.06.2025	57
DANGEROUS CARGO HANDLING MANUAL				

KİŞİSEL KORUYUCU DONANIMLARINDA EN STANDARTLARI


**KAFA KORUYUCULARINDA
EN STANDARTLARI**
EN 397 Bareti
EN 443 Yangın (Savunma) Bareti
EN 812 Bariyerli Kep

**KULAK KORUYUCULARINDA
EN STANDARTLARI**
EN 352 - 1 Kulaklıklar
EN 352 - 2 Kulak tıkacıları
EN 352 - 3 Kulaklıklar baretler

**EL KORUYUCULARINDA
EN STANDARTLARI**
EN 374 Kimyasal madde ve mikro
organizma eldivenleri
EN 374 - 2 Kimyasal maddeye içine alma
direnci (3 Kademe)
EN 374 - 3 Kimyasal maddeye içine alma
direnci (6 Kademe)
EN 381 - 1 Çelik örgü eldivenler
EN 388 Antiastatik mekanik iş eldivenleri
EN 407 Sıcak ış ve ısı eldivenleri
EN 420 Genel amaçlı eldivenler
EN 421 Iyonize ışınlara Radyasyona karşı
eldivenler
EN 511 Soğuk iş eldivenleri
EN 459 Yangın mücadele eldivenleri
EN 60903 Elektrik risklerine karşı eldivenler
EN 60903 Parmaksız özel amaçlı eldivenler

**GÖZ KORUYUCULARINDA
EN STANDARTLARI**
EN 166 Genel özellikler
EN 167 Optik test metodları
EN 168 Farklı optik test metodları
EN 169 Kaynak Filtreleri
EN 170 Ultraviyola Filtreleri
EN 171 İnflant Filtreleri
EN 175 Kaynak şerhleri başlıklar
EN 207 208 Laser Filtreleri
EN 379 Elektronik kaynak başlıklar


**SOLUNUM SİSTEMİ KORUYUCULARINDA
EN STANDARTLARI**
EN 136 Tam yüz maskeleri
EN 137 Solunum tüp ve sırtıkları
EN 139 Temiz hava beslemeli maskeler
EN 140 Yarı yüz maskeleri
EN 1437 Gaz buhar filtreleri
EN 143 Zerrecek (partikül) filtreleri
EN 12941 Kendinden hava beslemeli başlık maskeleri
EN 149 Bakım gerektirmeyen maskeler
EN 14694 Temiz hava basımlı başlıklar
EN 270 Kompresörden temiz hava beslemeli başlıklar
EN 403 Karşı maskeleri
EN 405 Bakım gerektirmeyen gaz-buhar maskeleri
(Filtreleri değiştirilmeyen maskeler)

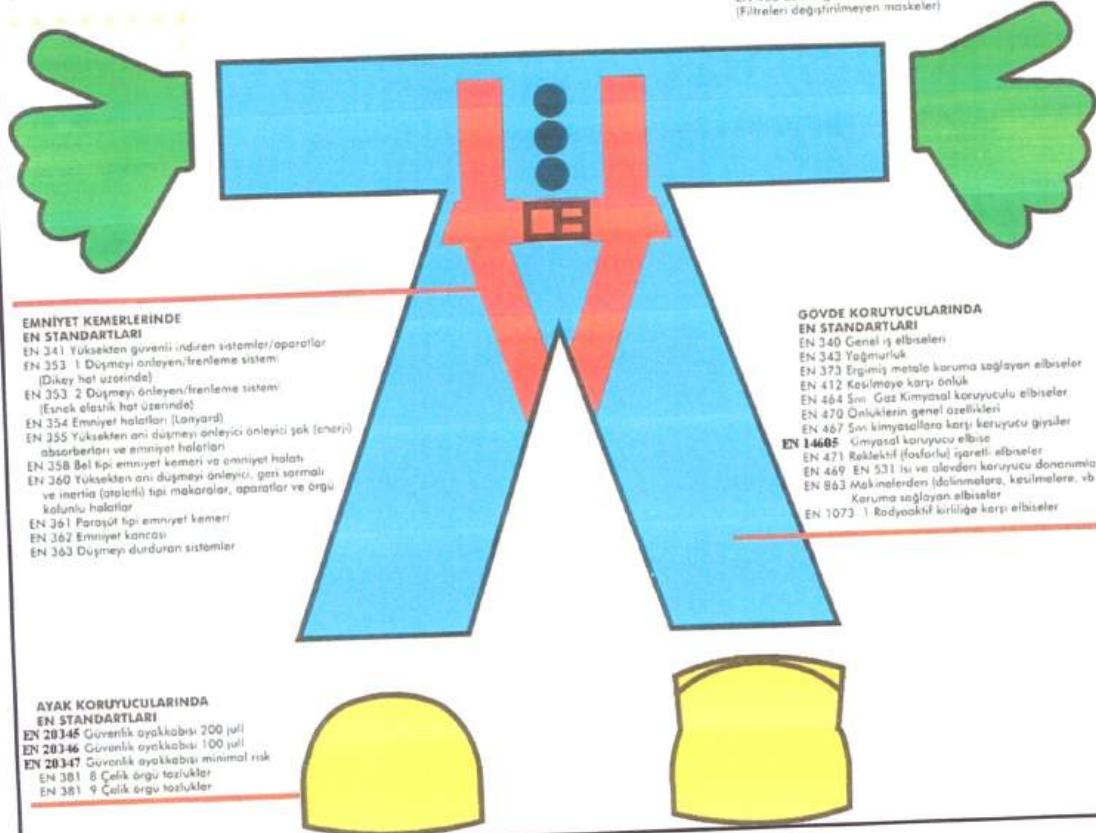

**EMNİYET KEMERLERİNDE
EN STANDARTLARI**
EN 341 Yüksekten güvenli indiren sistemler/aparatlar
EN 353 1 Düşmeyi önleyen/frenleme sistemi
(Dikey hat üzerinde)
EN 353 2 Düşmeyi önleyen/frenleme sistemi
(Esnek elastik hat üzerinde)
EN 354 Emniyet halatları (Lanyard)
EN 355 Yüksekten ani düşmeyi önleyici şok (enerji)
absorberleri ve emniyet halatları
EN 358 Bel tipi emniyet kemeri ve emniyet halatı
EN 360 Yüksekten ani düşmeyi önleyici, geri sarmalı
ve inertia (ataletli) tipi makaralar, aparatlar ve örgü
kolu halatlar
EN 361 Paraşüt tipi emniyet kemeri
EN 362 Emniyet kancası
EN 363 Düşmeyi durduran sistemler

**GOVDE KORUYUCULARINDA
EN STANDARTLARI**
EN 340 Genel iş elbiseleri
EN 343 Yağmurluk
EN 373 Ergonomik malzeme koruma sağlayan elbiseler
EN 412 Kesilmeye karşı önük
EN 464 Sıvı Gaz Kimyasal koruyucu elbiseler
EN 470 Önlüklerin genel özellikleri
EN 467 Sıvı kimyasallara karşı koruyucu giysiler
EN 14605 Kimyasal koruyucu elbise
EN 471 Reflektif (fosforlu) işaretli elbiseler
EN 469 EN 531 lu ve alevden koruyucu donanımlar
EN 863 Makinelerden (dolanımlara, kesimlere, vb.)
Koruma sağlayan elbiseler
EN 1073 1 Radyoaktif kirliliğe karşı elbiseler

**AYAK KORUYUCULARINDA
EN STANDARTLARI**
EN 20345 Güvenlik ayakkabısı 200 jül
EN 20346 Güvenlik ayakkabısı 100 jül
EN 20347 Güvenlik ayakkabısı minimal risk
EN 381 8 Çelik örgü tozluçuklar
EN 381 9 Çelik örgü tozluçuklar

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	58
	DANGEROUS CARGO HANDLING MANUAL				

9.3 Entry Permit Measures and Procedures for the Restricted Areas

A Work Permit Procedure has been established in order to prevent accidents and eliminate risks by providing a safe environment by applying the safety management system requirements during the works at our coastal facility

Within the scope of this procedure, completely or partially closed volumes where the air inside the space can harm human health and safety due to the lack of natural air circulation is called "restricted area". The requirements of the work permit procedure are applied in works that require personnel to enter any restricted area or pits with a depth of more than 1.5 meters. If it is necessary to work with a fire in a closed or all-enclosed area, then a Hot Work Permit must also be issued/obtained.


While the work permit is given and the work continues, the Restricted Area Access Control Form and the relevant Work Permit are only for granting the indoor entry permit. Access Control Form is used to control whether the work is done within the framework of the given permission and rules. It is not meant to approve of the work to be done inside. Other control forms and annexes are prepared according to the work to be done inside. In all Restricted Area Entry Permits, gas measurement is duly performed by an authorized/qualified person. This leave is only valid for that working day.

Examples of the main hazards that may be encountered while working in closed spaces are as follows but these hazards are not limited to the following:

- Oxygen deficiency,
- Enriched oxygen,
- Nitrogen (N₂), carbon dioxide (CO₂), Halon etc. gases,
- Existence of flammable materials,
- Toxic substances,
- High level of noise,
- Static electricity generation (can create sparks),
- Radiation ionization-spread,
- Caves, collapses, landslides,

In the event of an emergency while working in a confined space, the Restricted Area Entry Permit becomes invalid. All personnel working in the area leave the area safely and go to the assembly point.

The original and annexes of the work permits and the work permit control forms are kept by the Terminal Management for a period of five years.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	59
	DANGEROUS CARGO HANDLING MANUAL				


10 OTHER ISSUES

10.1 Validity of Dangerous Goods Conformity Certificate

Our Coastal Facility's Dangerous Goods Compliance Certificate (TYUB) is valid until 30.09.2023, and the Dangerous Goods Compliance Certificate (TYUB) is renewed every 3 years with the permission of the Ministry, within the scope of the Directive on Issuing the Coastal Facility Dangerous Cargo Compliance Certificate.

10.2 Duties Defined for Dangerous Goods Safety Advisor:

- ✓ To monitor compliance with the provisions of international agreements and contracts (ADR/RID/IMDG Code) in the transportation of dangerous goods.
- ✓ To provide suggestions to the business regarding the transportation of dangerous goods in accordance with the provisions of ADR / RID / IMDG Cod.
- ✓ To prepare the annual activity report of the enterprise regarding the transportation of dangerous goods within the first three months as of the end of the year and submit it to the Administration in electronic environment. (Annual reports are kept for 5 years and submitted to the administration upon request.)
- ✓ Determining the dangerous goods to be transported and determining the requirements and compliance procedures in the ADR/RID/IMDG Code regarding this article.
- ✓ To provide trainings or get them provided to the employees of the enterprise about the national and international legislation and the changes made in them, and to keep the records of this training.
- ✓ To determine the emergency procedures to be applied in case of an accident or a possible event that will affect the safety during the transportation, loading or unloading of dangerous goods, and to ensure that the drills related to these are carried out by the employees periodically.
- ✓ To ensure that measures are taken to prevent the reoccurrence of accidents or serious violations.
- ✓ To ensure that the special conditions stipulated by the legislation regarding the transport of dangerous goods are taken into account in the selection and employment of subcontractors or third parties.
- ✓ To monitor compliance with the requirements for the transport of dangerous goods.
- ✓ To offer suggestions to the coastal facility regarding the transportation of dangerous goods.
- ✓ DGSA's authorized within the scope of the IMDG Code prepare quarterly reports regarding the responsibilities determined in the Regulation on the Maritime Transport of Dangerous Cargoes and Loading Safety of the Port facilities they serve, and notify this report to the Administration.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	60
	DANGEROUS CARGO HANDLING MANUAL				

10.3 Issues Regarding Carriers of Dangerous Goods at the Entry/Exit to and from the Coastal Facility by Road (Such as Documents Required by Road Vehicles Carrying Dangerous Goods at the Entry/Exit to/from the Port or Coastal Facility Area, Equipment and Tools Required by These Vehicles; Speed Limits in the Port Area Etc.)

10.3.1 Documents Required for Vehicles

In accordance with the Agreement on the Road and International Transport of Dangerous Goods (ADR) and the Regulation on the Transport of Dangerous Goods by Road, documents required for vehicles are as follows


- Transport Document
- Dangerous Goods Transport Driver Training Certificate (SRC-5),
- identification document bearing the holder's photo (identity card, driver's license or passport) for each personnel on duty in the vehicle,
- Transport Document
- Dangerous Goods Transport Driver Training Certificate (SRC-5),
- identification document bearing the holder's photo (identity card, driver's license or passport) for each personnel on duty in the vehicle,
- Dangerous Goods and Hazardous Waste Compulsory Liability Insurance policy for vehicles carrying dangerous goods

10.3.2 Equipment Required to be kept in Vehicles

1. Portable fire extinguishers,
2. Scotch suitable for the diameter and maximum mass of the wheel for each vehicle (at least 1 piece),
3. Warning sign that can be dug (2 pieces)
4. Eye rinse liquid
5. Warning vest
6. Portable lighting apparatus
7. A pair of protective gloves
8. Eye protection goggles
9. Emergency mask
10. Shovel
11. Drainage seal
12. Collection container

10.3.3 Speed Limits in the Port Area

The speed limits determined by our facility and specified on the traffic warning signs will be obeyed.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	61
	DANGEROUS CARGO HANDLING MANUAL				

10.4 Issues Regarding Carriers of Dangerous Goods Coming to/Leaving the Coastal Facility by Seaway (Matters such as Day/Night Signs to be Displayed by Vessels and Marine Vehicles Carrying Dangerous Goods at the Port or Coastal Facility, Cold and Hot Working Procedures on Vessels)

10.4.1 Day/Night Signs to be Displayed by Vessels and Sea Vehicles Carrying Dangerous Goods at the Port or Coastal Facility


The vessel arriving at the coastal facility and carrying dangerous goods will have the International Signal Code "B" during the day and 2 Fixed Red Lights at night.

10.4.2 Cold and Hot Working Procedures in Vessels Carrying Dangerous Cargo at the Coastal Facility:

- ✓ Cold and/or hot works are not allowed on vessels carrying dangerous goods in the coastal facility.

10.5 Additional Considerations to be Added by the Shore Facility

(NONE)

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	62
	DANGEROUS CARGO HANDLING MANUAL				

11 ANNEXES

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	63
	DANGEROUS CARGO HANDLING MANUAL				


ANNEX-1

GENERAL LAYOUT PLAN OF THE COASTAL FACILITY



iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	64
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX- 1 GENERAL LAYOUT PLAN OF THE COASTAL FACILITY (BUOY)

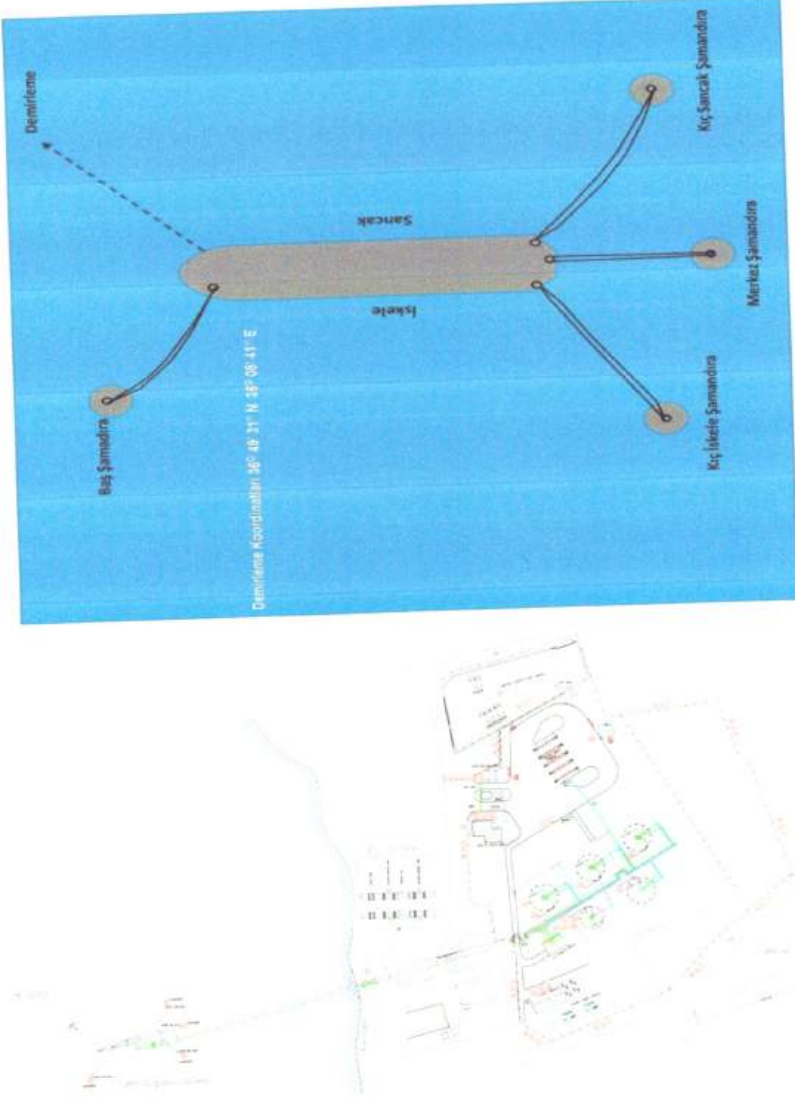

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	65
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-2 GENERAL VIEW PHOTOS OF THE COASTAL FACILITY




Document No	Issue Date	Rev. No	Revision Date	Page No
	01.01.2016	9	02.06.2025	66
DANGEROUS CARGO HANDLING MANUAL				

ANNEX-3 EMERGENCY CONTACT POINTS AND CONTACT INFORMATION


İPRAGAZ A.Ş. DÖRTYOL STORAGE TERMINAL EMERGENCY TELEPHONE CHAIN


DÖRTYOL STOKLAMA TERMINALİ TESİSİ ACİL TELEFON ZİNCİRİ

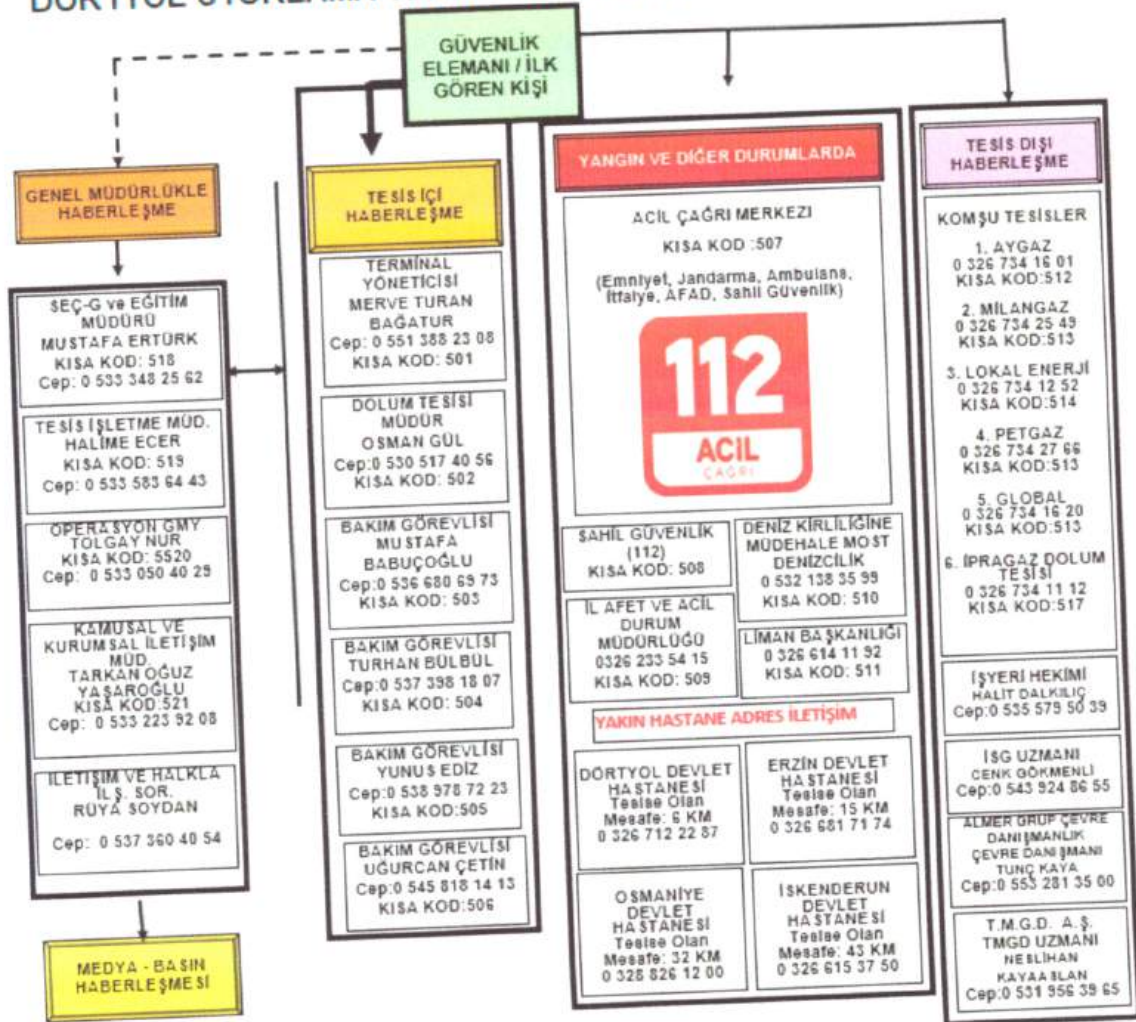

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	67
	DANGEROUS CARGO HANDLING MANUAL				


ANNEX 4- GENERAL LAYOUT OF AREAS WHERE DANGEROUS LOADS ARE HANDLED

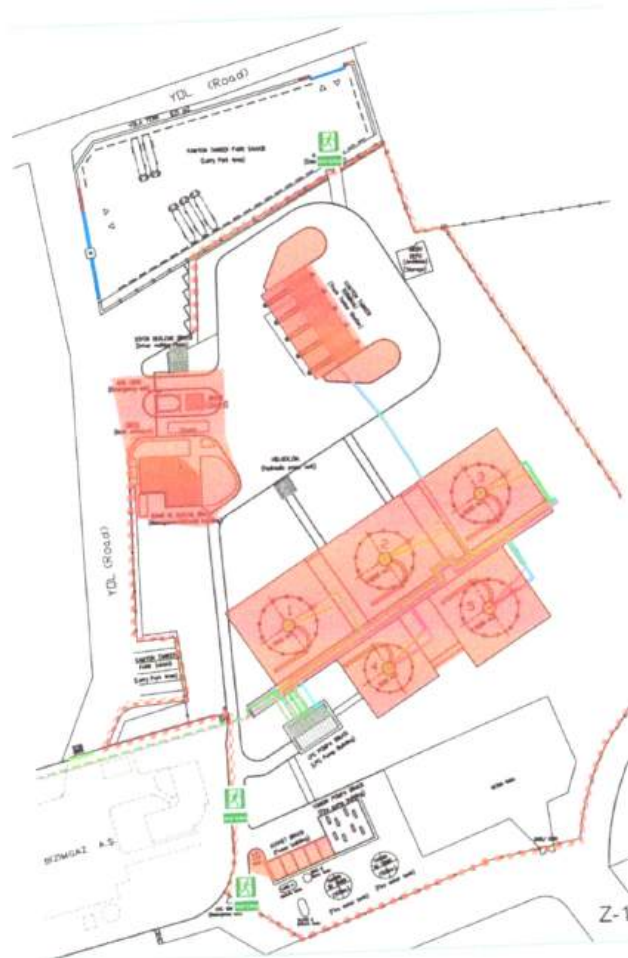

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	68
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-5 FIRE PLAN OF AREAS WHERE DANGEROUS LOADS ARE HANDLED

The facility is available in the General Fire Defense plan.


 İPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	70
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-7 EMERGENCY ACTION PLAN

EMERGENCY ACTION PLAN IS AS ITS IN THE
EMERGENCY ACTION PLAN of İPRAGAZ A.Ş.
DÖRTYOL STORAGE TERMINAL



iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	72
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-9 EMERGENCY MANAGEMENT CHART


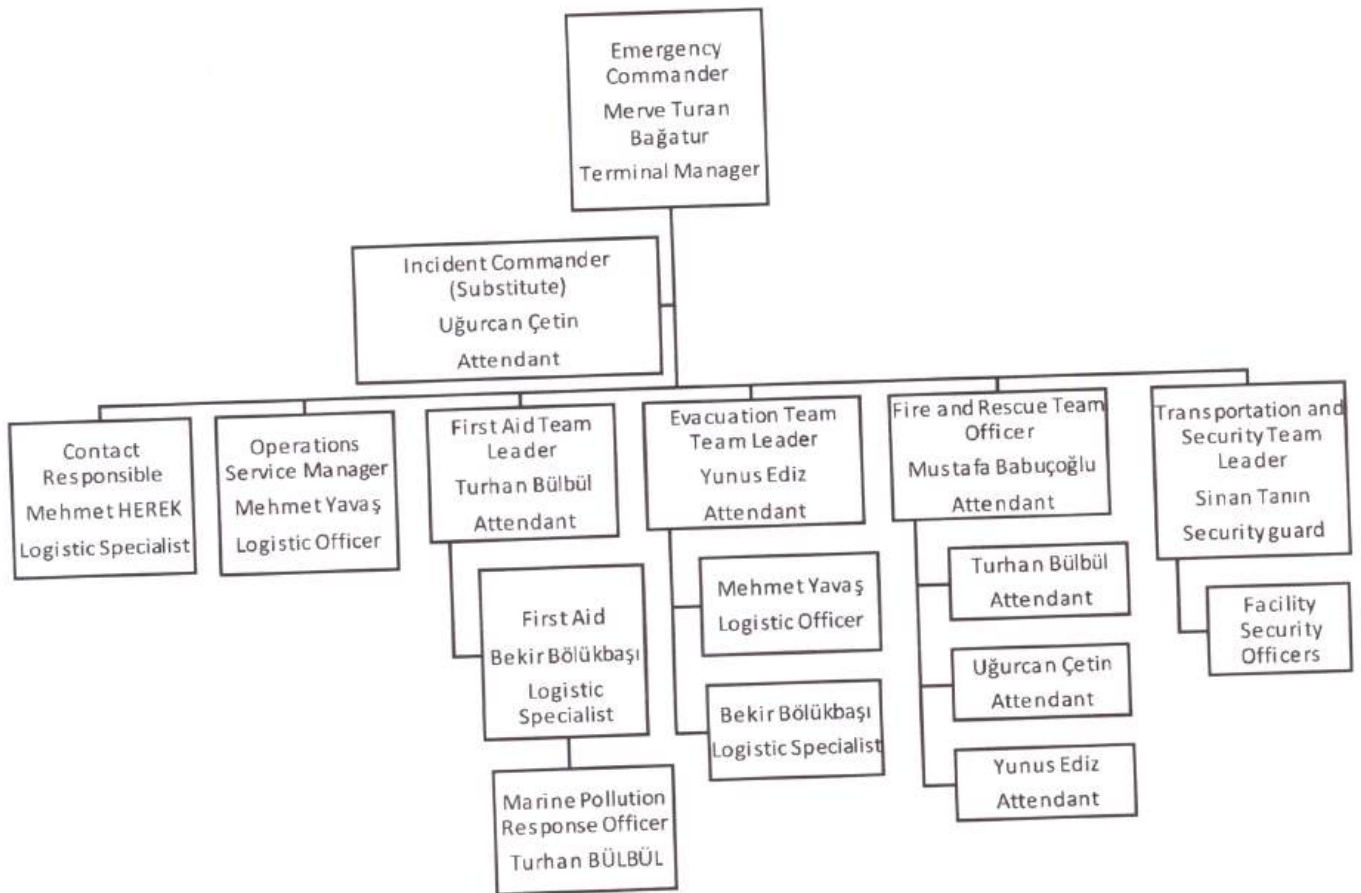



(Persons in Charge and Contact information in this organization are currently registered.)

ANNEX-10 DANGEROUS CARGO MANUAL

[illegible][illegible]

POTANSİYEL TEHLİKELER SÖN DERECE VAKKI	
<p>1.1. Kurulum veya alet montajıyla yapılabılır.</p> <p>1.2. Hava ile patlamaya zemin hazırlanabilir.</p> <p>1.3. Sıvıların birikmesi kaçaklarla bağlantılı taraflarda aşırı ve zemin boyuna yayılabilir.</p> <p>1.4. Bulaşık atma veya kaçakla boyuna yayılabilir ve yandırıcı olabilir.</p> <p>1.5. Malzemelerin baskın veya şiddetli reaksiyonları meydana gelebilir.</p> <p>1.6. Yangın maruz kalan tesisatın elemanları ve bina ve binalara zararlı etkilere sebebiyet verebilir.</p> <p>1.7. Gazlar, tozlar veya buharlar:</p> <ul style="list-style-type: none"> - tehlikeli ortamlara sebep olabilir. - tehlikeli ortamlarda tutulabilir. 	
SAĞLIK	
<p>1.1. Sıvıların bulaşması veya dökülmesi nedeniyle oluşabilir.</p> <p>1.2. Bulaşık su ile dermeye teması olabilir.</p> <p>1.3. Gaz veya buharların göze teması, tahsis, zehirli etkilere ve veya dermeye neden olabilir.</p> <p>1.4. Yangın tutulması, kısırlık ve veya tehlikeli gazların bulaşması olabilir.</p> <p>1.5. Yangın kontrol etme önlemleri veya yanlış kullanımı nedeniyle olabilir.</p>	
KAVULİ DÜŞÜMLERİ	
<p>Acil durum önlemleri alınmazsa, doluluk veya tırtıl alanına bir yandan en az 100 metre (328 ft) önüne</p> <p>1.1. Sıvıların üstten girip altına düşme riski vardır.</p> <p>1.2. Yangın patlaması, alevli tutuşma.</p> <p>1.3. Gazların kuru derimata</p> <p>1.4. Göz ve havadan aşırı ve zemin boyuna yayılabilir ağız ve kulağı alanına</p> <p>1.5. Konuşamazlığı, bedensel kısırlık, tırtıl ve veya tahsis, zehirli etkilere</p> <p>1.6. Kaza alanının gründen işleri etkiler, tahsis olabilir.</p>	
KORUYUCU ELMİRE	
<p>1.1. Pasif koruyucu önlemler alınmazsa, tehlikeli etkilere</p> <p>1.2. Çevre, tehlikeli etkilere ve veya tahsis etkilere sebep olabilir. Koruyucu bulaşık girmez.</p> <p>1.3. Pasif koruyucu önlemler veya işi tehlikeli etkilere sebep olabilir.</p> <p>1.4. Pasif koruyucu önlemler veya tahsis etkilere sebep olurumunda pasif koruyucu önlemler</p> <p>1.5. Pasif koruyucu önlemler veya tahsis etkilere sebep olurumunda pasif koruyucu önlemler</p> <p>1.6. Pasif koruyucu önlemler veya tahsis etkilere sebep olurumunda pasif koruyucu önlemler</p>	
TAKVİYE	
<p>1.1. Pasif koruyucu önlemler. Pasif koruyucu önlemler en az 800 metre tahsis etkilere</p> <p>1.2. Pasif koruyucu önlemler. Pasif koruyucu önlemler en az 800 metre tahsis etkilere</p> <p>1.3. Pasif koruyucu önlemler. Pasif koruyucu önlemler en az 800 metre tahsis etkilere</p> <p>1.4. Pasif koruyucu önlemler. Pasif koruyucu önlemler en az 800 metre tahsis etkilere</p>	

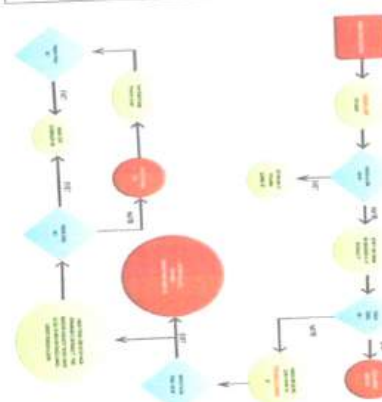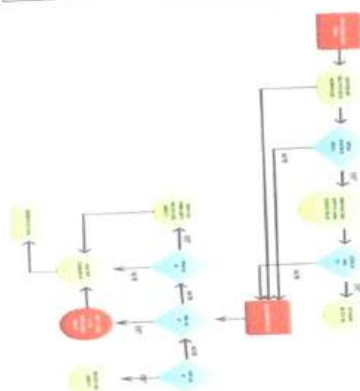


 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	75
	DANGEROUS CARGO HANDLING MANUAL				


**LEAKAGE AREAS ARE NOT AVAILABLE WITHIN THE
SCOPE OF THE LOAD HANDLED IN THE FACILITY.**

ANNEX-12 INVENTORY OF PORT SERVICE SHIPS


THERE IS NO SERVICE SHIP IN THE FACILITY INVENTORY.

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	76
	DANGEROUS CARGO HANDLING MANUAL				

12-1


 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	77
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-13 İSKENDERUN REGIONAL PORT MANAGEMENT ADMINISTRATIVE
BOUNDARIES, ANCHORING PLACES AND MARINE COORDINATES OF
MANAGEMENT CAPTAIN LANDING/EMBARKING POINTS

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	78
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-14 EMERGENCY RESPONSE EQUIPMENTS AGAINST MARINE POLLUTION IN THE COASTAL FACILITY

As in the Approved Marine Pollution Emergency Response Plan

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	79
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-15 PERSONAL PROTECTIVE EQUIPMENT (PPE) USAGE MAP

MATERIALS TO BE PROVIDED FOR ALL STAFF

1. Work Gloves (as they are worn out)
2. Raincoat (as it is worn out)
3. Helmet (when the usage term expires)
4. Safety shoes (a summer and a winter pair each (for administrative staff)
5. Leather jacket or coat (every three years)

MATERIALS TO BE PROVIDED FOR THE TECHNICAL STAFF

1. Work clothes (non-flammable) (summer and winter suits)
2. Coat (non-flammable) (every two years)
3. Ski mask or beret (annually)
4. Neoprene glove (quarterly)

MATERIALS TO BE PROVIDED FOR THE PROTECTION (PRIVATE SECURITY) PERSONNEL

1. Shirt (twice each for summer and winter)
2. Trousers (two pieces for summer and winter)
3. Tie (twice a year)
4. Cap (once a year)
5. Helmet cap (when the usage term expires)
6. Coat (Every two years)
7. Socks (two pairs for summer and winter)
8. Bandolier (twice a year)
9. Vest (once a year- in summer term)
10. Sweater (once a year- in winter term)
11. Gloves (once a year- in winter term)

Document No	Issue Date	Rev. No	Revision Date	Page No
	01.01.2016	9	02.06.2025	80
DANGEROUS CARGO HANDLING MANUAL				



ANNEX-16 DANGEROUS CARGO INCIDENTS NOTIFICATION FORM

iPRAGAZ	TEHLİKELİ MADDE KAZA/MAL KAYBI BİLDİRİM FORMU
---------	--

BÖLÜM I. KAZA/MAL KAYBI OLAN TEHLİKELİ MADDE BİLGİLERİ

Kaza/mal kaybı olan tehlikeli maddeler ile ilgili aşağıdaki bilgileri doldurunuz.

1.1. Kaza/Mal Kaybının Meydana Geldiği Tarih / Saat:.....

1.2. Kaza/Mal Kaybının Meydana Geldiği Taşıma Türü:

Karayolu

Demiryolu

Denizyolu

1.3. Olay Dahil Olan Tehlikeli Mallar:

UN No	Sınıf *	Ambalajlama Grubu	Tahmini Mal Kaybı Miktarı (Kg veya L)	Taşıma Kategorisi	Muhafaza Yöntemi ^b	Muhafaza Yöntemi Arıza Türü ^c

(a) İkinci Risk veya Deniz kirliliği riski varsa belirtiniz.

(b) İlgili Muhafaza Yönteminin Numarasını Yukarıdaki Tabloda belirtiniz.

(c) İlgili Muhafaza Yönteminin Arıza Türü Numarasını Yukarıdaki Tabloda belirtiniz.

1. Ambalaj	9. Tıplı gaz vagonu	1. Kayıp
2. IBC	10. Tıplı gaz tankeri	2. Yangın
3. Büyük ambalaj	11. Sökülebilir iskeletli vagon	3. Patlama
4. Küçük konteyner	12. Sökülebilir tank	4. Yıpranma
5. Vagon	13. Büyük konteyner	
6. Araç	14. Tank konteyner	
7. Tank-vagonu	15. MEGC	
8. Tanker	16. Portatif tank	

1.4. Tehlikeli Maddenin:


Alıcı Bilgileri:

Gönderen Bilgileri:

Üretici Bilgileri:

Taşıyan Bilgileri:

1.5. Olayın olduğu tarihteki meteorolojik koşullar:

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	81
	DANGEROUS CARGO HANDLING MANUAL				

**ANNEX-17 CONTROL RESULTS NOTIFICATION FORM
FOR DANGEROUS LOAD TRANSPORT UNITS (CTUS)**

**HAZARDOUS LOAD TRANSPORT UNITS (CTUS) ARE NOT
AVAILABLE WITHIN THE LOAD HANDLED IN THE
FACILITY**

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	82
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-18

OTHER ANNEXES REQUIRED

MULTIMODAL DANGEROUS LOADS FORM

Multimodal Dangerous Goods Form					
This form may be used as dangerous goods declarations as it meets the requirements of SOLAS 74, chapter VII, regulation 5; MARPOL 73/78, Annex III, regulation 4.					
1 Shipper / Consignor / Sender		2 Transport document number		3 Page 1 of Pages	
				4 Shipper's reference	
				5 Freight forwarder's reference	
6 Consignee		7 Carrier (to be completed by the carrier)			
		SHIPPER'S DECLARATION I hereby declare that the contents of this consignment are fully and accurately described below by the Proper Shipping Name, and are classified, packaged, marked and labelled / placarded and are in all respects in proper condition for transport according to the applicable international and national government regulations.			
10 Vessel and Voyage n°	11 Port of Loading	9 Additional handling information			
12 Port of Discharge	13 Destination				
14 Shipping mark	* Number and kind of packages; description of the goods	Gross mass (kg)	Net mass (kg)	Cube (m3)	
15 Container identification No. / vehicle registration No.		16 Seal numbers(s)	17 Container / vehicle size & type	18 Tare mass (kg)	19 Total gross (including tare) (kg)
CONTAINER / VEHICLE PACKING CERTIFICATE I hereby declare that the goods described above have been packed / loaded into the container / identified above in accordance with applicable provisions. ** MUST BE COMPLETED AND SIGNED FOR ALL CONTAINERS/VEHICLE LOADS BY PERSON RESPONSIBLE FOR PACKING/LOADING		21 RECEIVING ORGANIZATION RECEIPT Received the above number of packages/containers/trailers in apparent good order and condition, unless stated hereon: RECEIVING ORGANISATION REMARKS:			
20 Name of company		Haulier's name		22 Name of company (OF SHIPPER PREPARING THIS NOTE)	
Name/status of declarant		Vehicle reg. No.		Name/Status of declarant	
Place and date		Signature and date		Place and date	
Signature of declarant		DRIVER'S SIGNATURE		Signature of declarant	
* DANGEROUS GOODS: You must specify: Proper Shipping Name, hazard class, UM No., packing group, (where assigned) marine pollutant and observe the mandatory requirements under applicable national and international governmental regulations. For the purpose of the IMDG Code see 5.4.1.1. ** For the purposes of the IMDG Code, see 5.4.2.					

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	83
	DANGEROUS CARGO HANDLING MANUAL				



26.3.3 GEMİ / SAHİL EMNİYET KONTROL LİSTESİ

Geminin Adı:
İskele:
Varış Tarihi:

Liman:
Varış Saati:

Kısım 'A' - Dökme Sıvı Genel - Fiziksel Kontroller	Gemi	Terminal	Kod	Açıklamalar
Dökme Sıvı - Genel			R	
1. Gemi ile iskele arasında güvenli bir geçiş vardır.			R	
2. Gemi emniyetli bir şekilde bağlıdır.			A R	Sistem: Backup sistem
3. Kararlaştırılan gemi/sahil iletişim sistemi faal durumdadır.			R	
4. Acil çekme tel hatları doğru olarak yerleştirilmiş ve donatılmıştır.			R	
5. Geminin yangın hortumları ve yangınla mücadele ekipmanı yerleştirilmiş ve derhal kullanım için hazırdır.			R	
6. Terminalin yangınla mücadele ekipmanı yerleştirilmiş ve derhal kullanım için hazırdır.				
7. Geminin kargo ve akaryakıt hortumları, boru devreleri ve manifoldları iyi durumda, uygun olarak donatılmış ve istenilen hizmet için uygundur.				
8. Terminalin kargo ve akaryakıt hortumları, boru devreleri ve manifoldları iyi durumda, uygun olarak donatılmış ve istenilen hizmet için uygundur.				
9. Kargo transfer sistemi, yeterli olarak izole edilmiştir ve bağlanmadan önce kor filençlerin güvenli alınmasına izin vermesi için drenaj edilmiştir.				
10. Güverte üzerindeki bütün frengiler etkili olarak tapalanmıştır ve damla tavaları yerinde ve boyalıdır.			R	
11. Geçici olarak çıkarılan frengi tapaları devamlı olarak izlenmiş olacaktır.			R	
12. Sahil dökme kapları ve kuyuları doğru olarak yönetilmiştir.			R	
13. Geminin kullanılmayan kargo ve akaryakıt bağlantıları kor filençler ile tamamen cıvatalanmış olarak uygun şekilde kapatılmıştır.				
14. Terminalin kullanılmayan kargo ve akaryakıt bağlantıları kor filençler ile tamamen cıvatalanmış olarak uygun şekilde kapatılmıştır.				
15. Butun kargo, balast ve akaryakıt tank kapakları kapalıdır.				
16. Deniz ve borda çıkış/tahliye valfleri, kullanılmadığı zaman, kapatılmış ve görünür bir şekilde emniyete alınmıştır.				
17. Butun harici kapılar, kaportalar ve ya- jam mahallindeki lumbazlar, mağazalar ve makine bölümleri kapalıdır. Makine dairesi havalandırması açık olabilir.			R	
18. Geminin acil yangın kontrol planları dışarıya yerleştirilmiştir.				Bulunduğu yer:

Eğer gemi bir inert gaz sistemi (IGS) ile donatılmışsa veya donatılmasını talep etmişse, aşağıdaki noktalar fiziksel olarak kontrol edilmelidir:

Inert Gaz Sistem	Gemi	Terminal	Kod	Açıklamalar
19. Sabit IGS basıncı ve oksijen miktarını kaydedici cihazlar çalışıyor.			R	
20. Butun kargo tank atmosferleri hacimce %8 veya daha az bir oksijen miktarı ile pozitif basıncıdadır.			P R	

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	84
	DANGEROUS CARGO HANDLING MANUAL				

Kısım 'B' - Dökme Sıvı Genel - Sözlü Doğrulama	Gemi	Terminal	Kod	Açıklamalar
Dökme Sıvı - Genel			P R	
21. Gemi kendi makinesi ile harekete hazırdır.			R	
22. Gemi ve terminalde operasyonların uygun denetimi ve gemidekilerin maliyetinde etkili bir güverte nöbeti vardır.			R	
23. Sahilde ve gemide acil bir durumun icabına bakmak için yeterli personel vardır.			A R	
24. Kargo, akaryakıt ve balast elleçleme için prosedürlerde mutabakat sağlanmıştır.			A	
25. Acil durum sinyali ve gemi ve sahil tarafından kullanılan durdurma prosedürleri açıklandı ve anlaşıldı.			A	
26. Kargo transferi için Malzeme Güvenlik Bilgi Formları (MSDS) gerektiği yerde değiştirildi.			P R	
27. Elleçlenmekte olan kargonun içinde zehirli maddeler ile bağlantılı tehlikeler tanımlandı ve anlaşıldı.				H2S Miktarı: Benzen miktarı:
28. Bir Uluslararası Sahil Yangın Bağlantısı sağlanmıştır.			A R	Metodu:
29. Mutabık kalınan tank havalandırma sistemi kullanılacak.			R	
30. Kapalı operasyonlar için gereksinimlerde mutabakat sağlandı.				
31. PA/ sistemin çalışması doğrulandı.				
32. Bir buhar dönüş devresinin bağlandığı yerde, çalıştırma parametrelerinde mutabakata varıldı.			A R	
33. Eğer donatılmışsa, bağımsız yüksek seviye alarmları çalışır durumda ve test edildi.			A R	
34. Gemi/sahil bağlantısında uygun elektrik yalıtım vasıtaları yerindedir.			A R	
35. Bir geri döndürme valf ile donatılan sahil devreleri veya geri kaçmadan sakınmak için prosedürler görüldü.			P R	
36. Sigara içme odaları tayin edildi ve sigara içme gereksinimleri gözlenmektedir.			A R	Tayin edilen sigara içme odaları:
37. Çıplak ışık kuralları gözlenmektedir.			A R	
38. Gemi/sahil telefonları, taşınabilir telefonlar ve çağrı cihazları gereksinimleri gözlenmektedir.			A R	
39. El fenerleri onaylı tiplerden biridir.				
40. Sabit VHF/UHF vericileri ve AIS ekipmanı doğru güç modunda veya kapalıdır.				
41. Seyyar VHF/UHF vericileri onaylı tiplerden biridir.				
42. Geminin ana telsiz verici antenleri topraklanmış ve radarlar kapalıdır.				
43. Tehlikeli bölge içindeki seygar elektrikli ekipmana kullanılan elektrik kabloları güç kaynağından sökülüştür.				
44. Pencere tipi iklimlendirme üniteleri bağlantısı kesildi.				
45. Yaşam mahallinin içinde pozitif basınç korunmaktadır ve kargo buharlarının girişine izin verebilir hava iklimlendirme girişleri kapalıdır.			R	
46. Pompa dairesinde uygun mekanik havalandırma sağlanmak için ölçümler alındı.				
47. Acil bir kaçış için hazırlık vardır.				Kargonun durması: Sökülme: Ayrılma:
48. Operasyonlar için maksimum rüzgar ve ölü dalga kriteri.			A	
49. Uygunsa, Liman Tesisi Güvenlik Zabiti ve Gemi Güvenlik Zabiti arasında güvenlik protokollerinde mutabakata varıldı.			A	
50. Uygun olduğu yerde, ya inertleme veya geminin tanklarına porç yapmak için ya da geminin içine devreyi temizleme için sahilten nitrojen ikmal alımı için prosedürlerde mutabakata varıldı.			A P	

iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	85
	DANGEROUS CARGO HANDLING MANUAL				


Eğer gemi bir inert gaz sistemi (IGS) ile donatılmışsa, veya donatılmasını talep etmişse, aşağıdaki ifadeler yazılmalıdır:

Inert Gaz Sistem	Gemi	Terminal	Kod	Açıklamalar
51. IGS tam olarak faal ve iyi çalışır durumdadır.			P	
52. Güverte (su) silleri veya muadili iyi çalışır durumdadır.			R	
53. Basınç/vakum kırıcılarında sıvı seviyeleri doğrudur.			R	
54. Sabit ve seyir oksijen analiz ediciler kalibrasyonları yapılmış ve uygun bir şekilde çalışıyorlar.			R	
55. Bütün tank bireysel IG valfları (donatılmışsa) doğru olarak ayarlanmış ve kilitlenmıştır.			R	
56. Kargo operasyonlarıyla sorumlu bütün personel, inert gaz tesisinin kusuru halinde tahliye operasyonlarının durdurulması ve terminale haber verilmesini farkındadır.				

Kısım 'D' - Dökme Sıvılaştırılmış Gazlar- Sözlü Doğrulama

Dökme Sıvılaştırılmış Gazlar	Gemi	Terminal	Kod	Açıklamalar
1. Kargonun güvenli elleçlenmesi için gerekli bilgiyi veren Madde Güvenlik Bilgi Formları (MSDS) elde mevcuttur.				
2. Bir imalatçı yasaklama sertifikası, uygun olduğu yerde, temin edildi.				
3. Su sprey sistemi derhal kullanım için hazır.				
4. Yeterli uygun koruyucu ekipman (kendinden destekli solunum aparatı dahil) vardır ve derhal kullanım için koruyucu giysi hazır.				
5. Ambar ve bariyer arasındaki bölümler uygun bir şekilde inertleştirilmiş veya gerektiği gibi, kuru hava ile doldurulmuştur.				
6. Bütün uzaktan kontrol valfları çalışır durumdadır.				
7. Gerekli kargo pompaları ve kompresörler iyi durumdadır ve maksimum çalışma basınçları (hususunda), hususunda gemi ve mutabakata varıldı.			A	
8. Sıvı haline gelme veya kaynama kontrol ekipmanı iyi durumdadır.				
9. Gaz bulma ekipmanı kargo için uygun olarak ayarlandı, kalibrasyonu yapıldı, test edildi ve kontrol edildi ve iyi durumdadır.				
10. Kargo sistem göstergeleri ve alarmları doğru olarak ayarlandı ve iyi durumdadır.				
11. Acil durdurma sistemleri test edildi ve uygun şekilde çalışıyor.				
12. Gemi ve sahil birbirinin ESD valflarının, otomatik valfların ve benzer düzenlerin kapatma hızı hususunda bilgilendi.			A	Gemi: Sahil:
13. Elleçlenecek olan kargonun maksimum/ minimum sıcaklığında/basınçlarında gemi ve sahil arasında bilgi değişimi yapıldı.			A	
14. Herhangi bir kargo operasyonu ilerlerken, her zaman kargo tanklarının dikkatsizce aşırı dolmasına karşı korunmuştur.				
15. Kompresör dairesi uygun olarak havalandırılmıştır, elektrik motor dairesi uygun olarak basınçlandırılmıştır ve alarm sistemi çalışıyor.				
16. Kargo tank emniyet valfları doğru olarak ayarlanmıştır ve gerçek emniyet valfinin ayarları açık ve görünür bir şekilde gösterilmiştir. (Ayarların kaydı aşağıdadır.)				

Tank No.1	Tank No.6
Tank No.2	Tank No.7
Tank No.3	Tank No.8
Tank No.4	Tank No.9
Tank No.5	Tank No.10

	Document No	Issue Date	Rev. No	Revision Date	Page No
 iPRAGAZ		01.01.2016	9	02.06.2025	86
	DANGEROUS CARGO HANDLING MANUAL				



DEKLARASYON


Bu kontrol listesini, gerektiği yerde ortaklaşa olarak kontrol ettik, bilgimiz dahilindeki girişlerin doğru olduğundan emin oldu

Ayrıca ihtiyaç duyulduğunda kontrollerin tekrarlanması için gerekli düzenlemeyi yaptık ve Kontrol Listesindeki 'R' kodlarıyla işaretli maddelerin saatleri aşmayan aralarda yeniden kontrol edilmesi gerektiği kararına vardık.

Gemi için			Sahil için
Adı			Adı
Görevi			Pzisyonu veya Unvanı
İmza			İmza
Tarih			Tarih
Saat			Saat

Kontrollerin tekrarlanması kaydı:

Tarih:			
Saat:			
Gemi için ilkler:			
Sahil için ilkler:			

 iPRAGAZ	Document No	Issue Date	Rev. No	Revision Date	Page No
		01.01.2016	9	02.06.2025	87
	DANGEROUS CARGO HANDLING MANUAL				

ANNEX-19 Dangerous Goods Handling Guide Additional Cargo
Notification (When necessary)

Not applicable.

Dangerous Goods Safety Advisor
Name/Surname/Signature

Neslihan KAYAASLAN



Port Facility Official/Manager
Name/Surname/Signature

Merve Turan Bagatur

